

X-LSM150B-SV1 Datasheet



- Vacuum compatible to 10⁻³ Torr
- 25, 50, 100, 150, 200 mm travel
- Up to 100 mm/s speed and up to 35 N thrust
- 10 kg load capacity
- Built-in controller; daisy-chains with other Zaber products
- Only 4 feedthrough wires required to control all units in the daisy-chain via serial port (with an X-PIB adaptor)
- Custom versions available

X-LSM-SV1 Series Overview

For more information about the basics of a vacuum system and considerations to keep in mind when gathering requirements for your application, read our technical article, "Motion Device Design Considerations for Vacuum Applications".


Zaber's X-LSM-SV1 Series devices are low-vacuum compatible, computer-controlled, motorized linear stages with high thrust and speed capabilities, and a compact size. They are stand-alone units requiring only a standard 24 V or 48 V power supply.

These stages connect to the RS-232 port or USB port of any computer, and they can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply.

At only 21 mm high, these miniature stages are excellent for applications where a small profile is required. The X-LSM-SV1 is designed with vacuum compatible materials to minimize outgassing and allow for faster pump down times. Like all of Zaber's products, the X-LSM-SV1 Series is designed to be 'plug and play' and very easy to set up and operate.

For more information visit: <https://www.zaber.com/products/vacuum-compatible-stages/X-LSM-SV1>

X-LSM-SV1 Series Part Numbering & Options

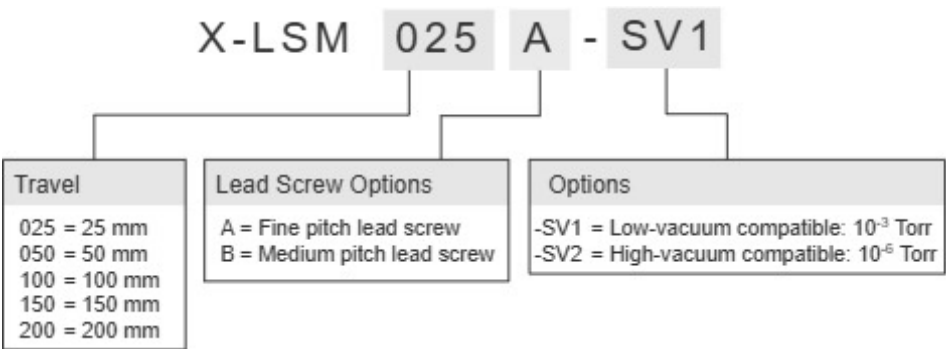

X-LSM150B-SV1 Drawings

- [X-LSM-SV.png \(Drawing for the X-LSM-SV\)](#)


X-LSM150B-SV1 Specifications

Microstep Size (Default Resolution)	0.1905 μm
Built-in Controller	Yes
Travel Range	152.4 mm (6.000")
Accuracy (unidirectional)	65 μm (0.002559")
Repeatability	< 6 μm (< 0.000236")
Backlash	< 16 μm (< 0.000630")
Maximum Speed	100 mm/s (3.937"/s)
Minimum Speed	0.000116 mm/s (0.000005"/s)
Speed Resolution	0.000116 mm/s (0.000005"/s)
Encoder Type	No
Peak Thrust	15 N (3.4 lb)
Maximum Continuous Thrust	25 N (5.6 lb)
Communication Interface	RS-232
Communication Protocol	Zaber ASCII (Default), Zaber Binary
Data Cable Connection	Teflon flying leads with M8 4 pin M/F
Maximum Centered Load	100 N (22.4 lb)
Maximum Moment (Roll)	300 N-cm (424.8 oz-in)
Maximum Moment (Pitch)	300 N-cm (424.8 oz-in)
Maximum Moment (Yaw)	300 N-cm (424.8 oz-in)
Guide Type	Needle roller bearing
Vertical Runout	< 25 μm (< 0.000984")
Horizontal Runout	< 23 μm (< 0.000906")
Pitch	0.04° (0.698 mrad)
Roll	0.05° (0.873 mrad)
Yaw	0.05° (0.873 mrad)
Stiffness in Pitch	55 N-m/° (317 $\mu\text{rad/N-m}$)
Stiffness in Roll	52.5 N-m/° (332 $\mu\text{rad/N-m}$)
Stiffness in Yaw	85 N-m/° (205 $\mu\text{rad/N-m}$)


Microstep Size (Default Resolution)	0.1905 μm
Power Supply	24-48 VDC
Power Plug	None, use X-PIB
Maximum Current Draw	350 mA
Linear Motion Per Motor Rev	2.4384 mm (0.096")
Motor Steps Per Rev	200
Motor Type	Stepper (2 phase)
Motor Rated Current	800 mA/phase
Inductance	3.5 mH/phase
Default Resolution	1/64 of a step
Mechanical Drive System	Precision lead screw
Limit or Home Sensing	Magnetic hall sensor
Manual Control	No
Axes of Motion	1
LED Indicators	Yes
Mounting Interface	M3 and M6 threaded holes and M4 threaded center hole
Stage Parallelism	< 25 μm (< 0.000984")
Operating Temperature Range	0 to 50 °C
CE Compliant	Yes
Vacuum Compatible	Low vacuum (10 ⁻³ Torr)
Weight	0.47 kg (1.036 lb)

X-LSM-SV1 Series Charts


Thrust Speed Performance

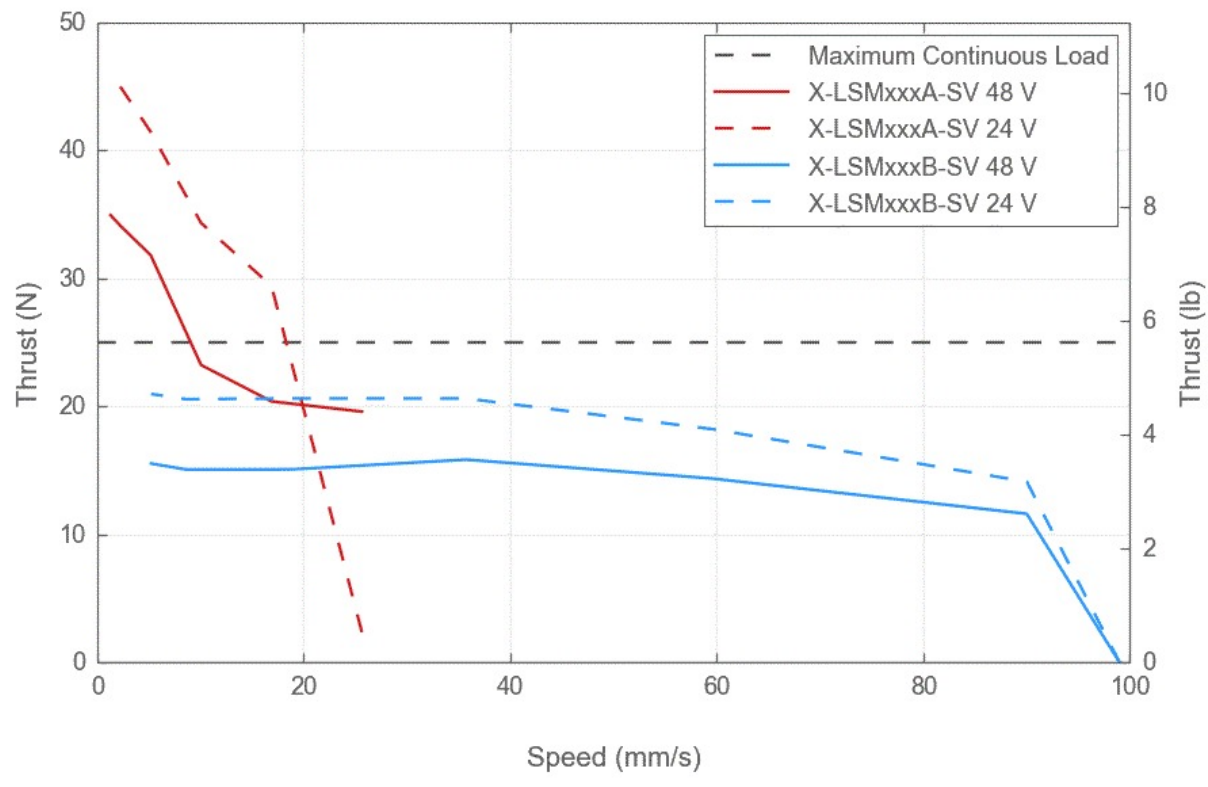


Duty Cycle vs Run Current

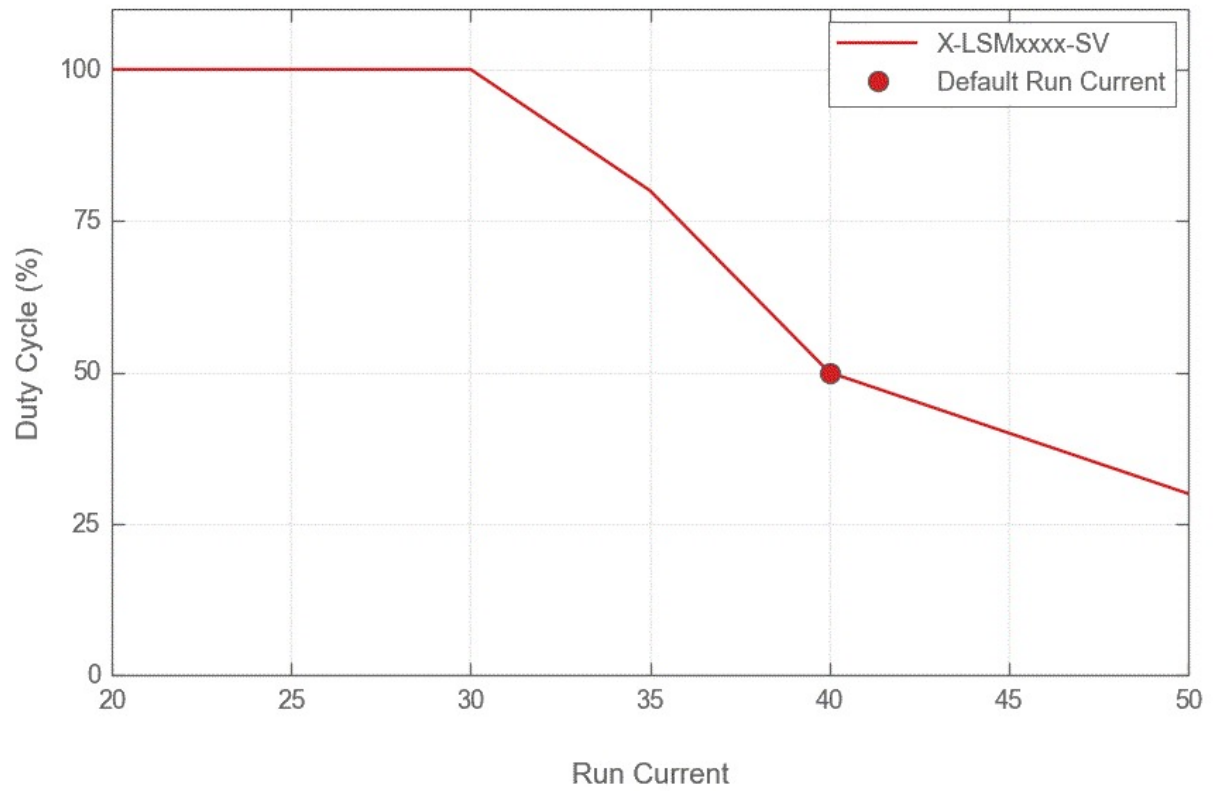


Typical Microstepping Accuracy

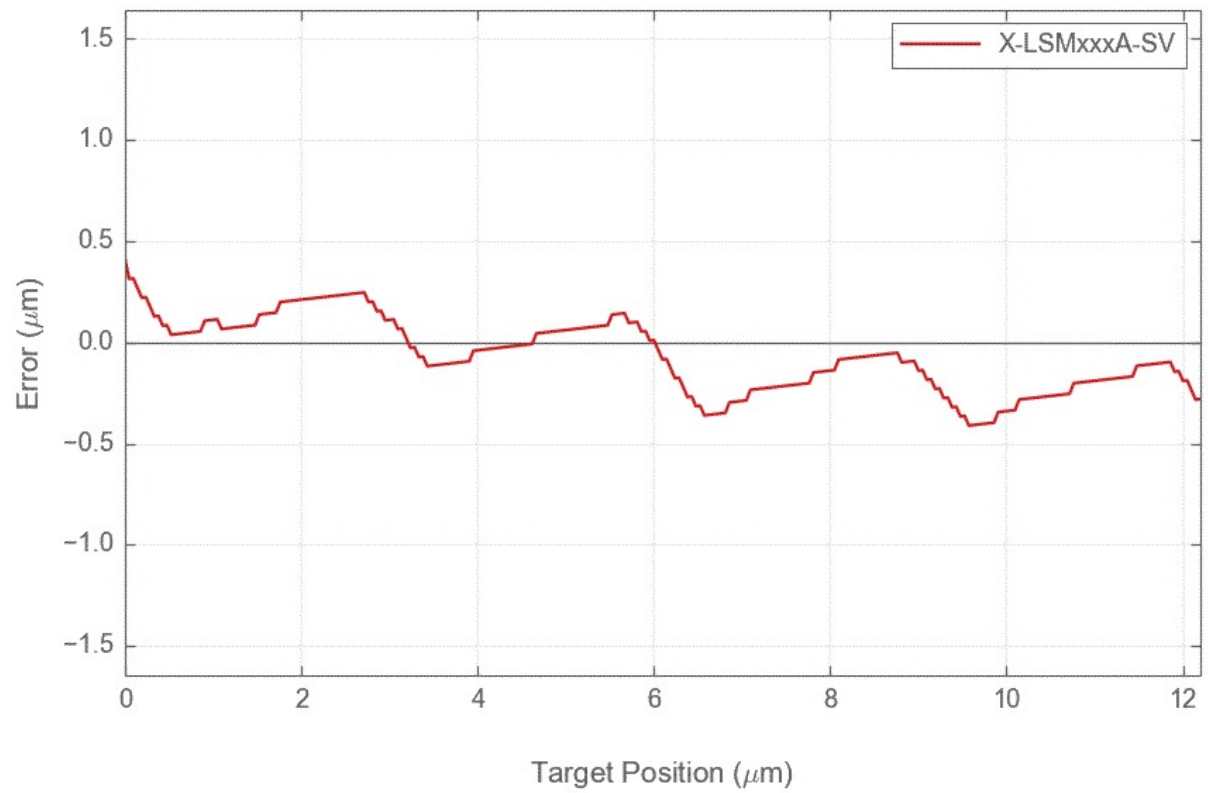

Typical Microstepping Accuracy

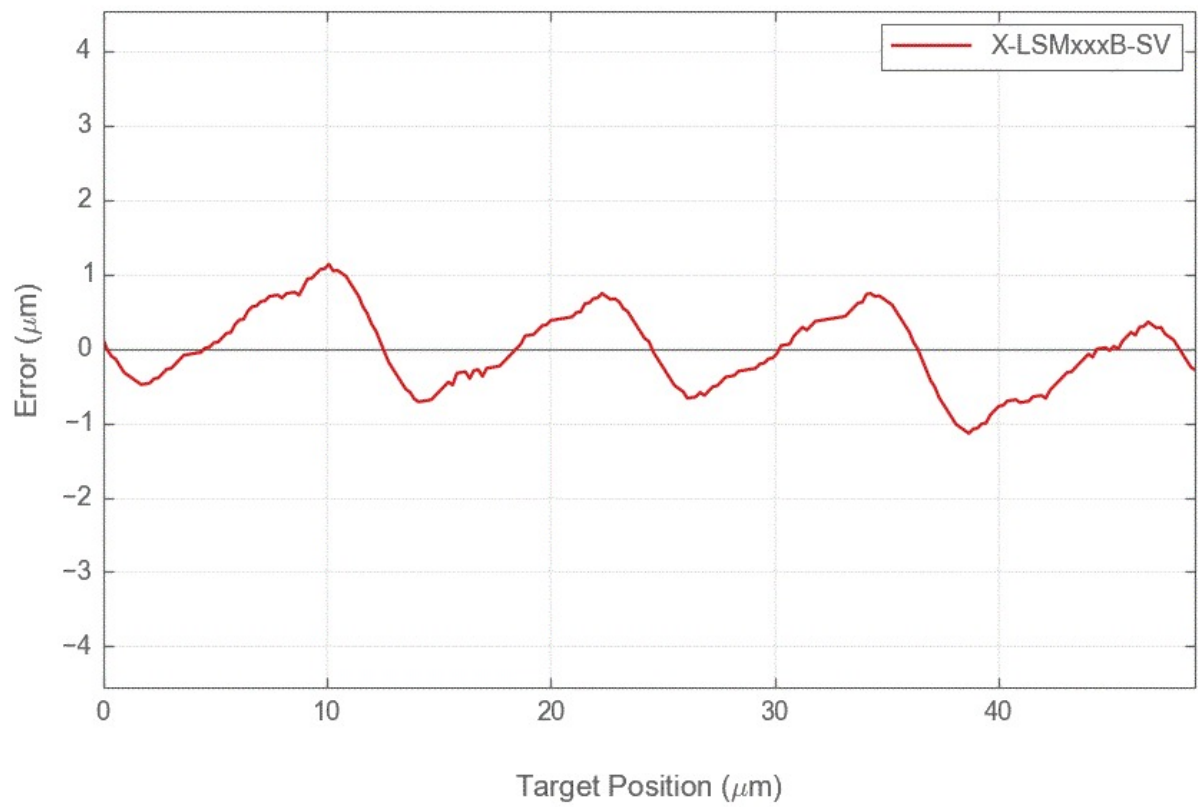

LSM Linear Bearing Lifetime

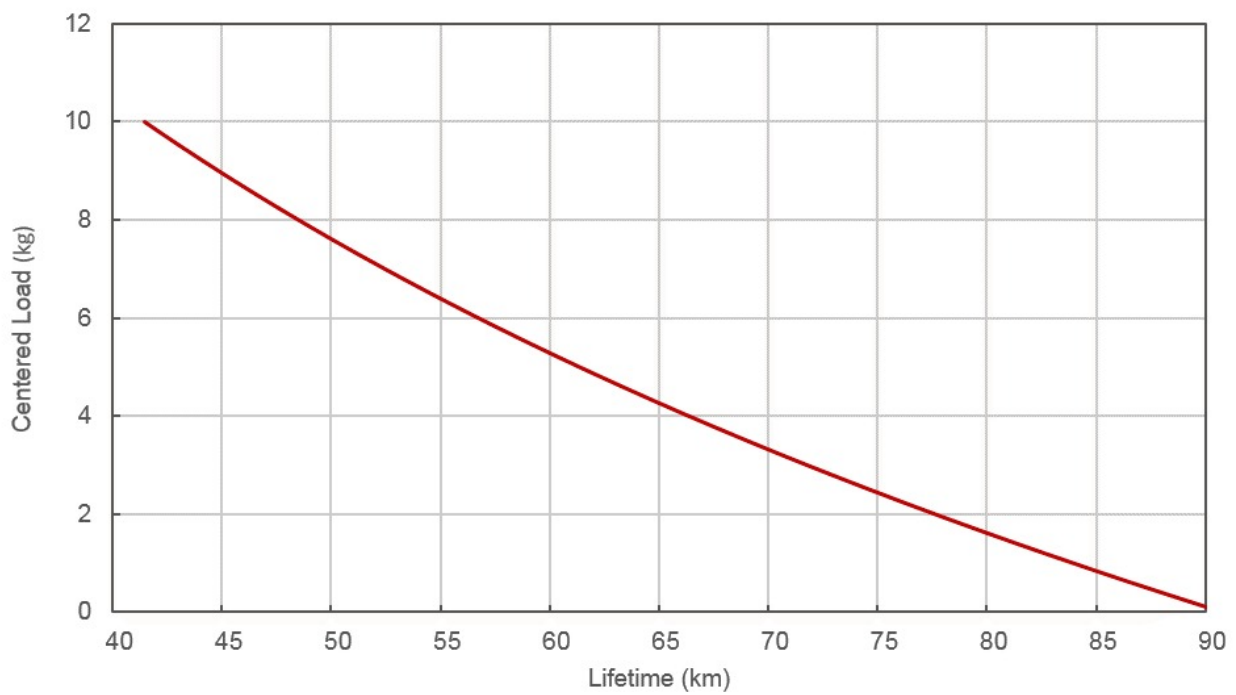

Contact

Email: contact@zaber.com

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>