

X-LRQ075AL-DE51C Datasheet



- 75, 150, 300, 450, 600 mm travel
- Up to 10 μm accuracy over 600 mm travel
- Up to 205 mm/s speed and up to 300 N thrust
- 100 kg load capacity
- Inline and parallel drive configurations
- Includes stainless steel dust cover
- Ball screw and lead screw configurations
- Integrated linear encoders with 50 nm resolution provide slip/stall detection and position correction
- Built-in controller; daisy-chains with other Zaber products
- Custom versions available

X-LRQ-DEC Series Overview


Zaber's X-LRQ-DEC Series devices are computer-controlled, motorized linear stages with high stiffness, load, and lifetime capabilities in a compact size. An integrated linear encoder combined with stage calibration provides high accuracy positioning over the full travel of the device. Each device is available in either an inline or parallel drive configuration. A flexible stainless steel dust cover prevents the ingress of small objects. They are stand-alone units requiring only a standard 24 V or 48 V power supply. An optional indexed knob provides convenient manual control for versatile operation even without a computer.

These stages connect to the RS-232 port or USB port of any computer, and they can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply. Convenient locking, 4-pin, M8 connectors on the unit allow for secure connection between units.

At only 48 mm high, these stages are excellent for applications where a low profile is required. The X-LRQ-DEC's innovative design allows speeds up to 205 mm/s and loads up to 100 kg. Like all of Zaber's products, the X-LRQ-DEC Series is designed to be 'plug and play' and very easy to set up and operate. These stages can bolt together into XY and XYZ systems. Some multi axis configurations may require additional accessories, please contact Zaber Technical Support to ensure the correct ones are selected.

For more information visit: <https://www.zaber.com/products/linear-stages/X-LRQ-DEC>

X-LRQ-DEC Series Part Numbering


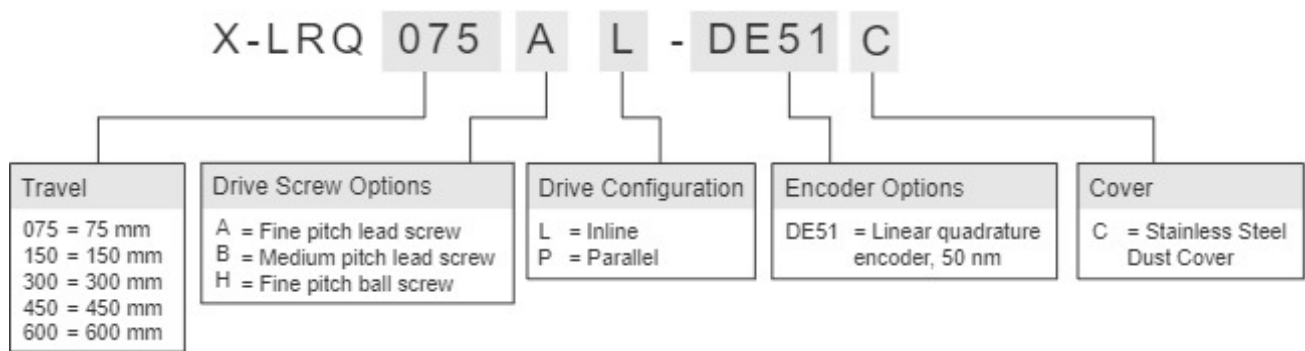


X-LRQ075AL-DE51C Drawings

ZABER
X-LRQxL-DEC Motorized Linear Stage
dimensions in mm

Model Number*	Travel	A	B
X-LRQ075xL-DEC	75.0	329.9	167.0
X-LRQ150xL-DEC	150.0	404.9	242.0
X-LRQ300xL-DEC	300.0	554.9	392.0
X-LRQ450xL-DEC	450.0	704.9	542.0
X-LRQ600xL-DEC	600.0	854.9	692.0

*See product page for complete list of available models at www.zaber.com

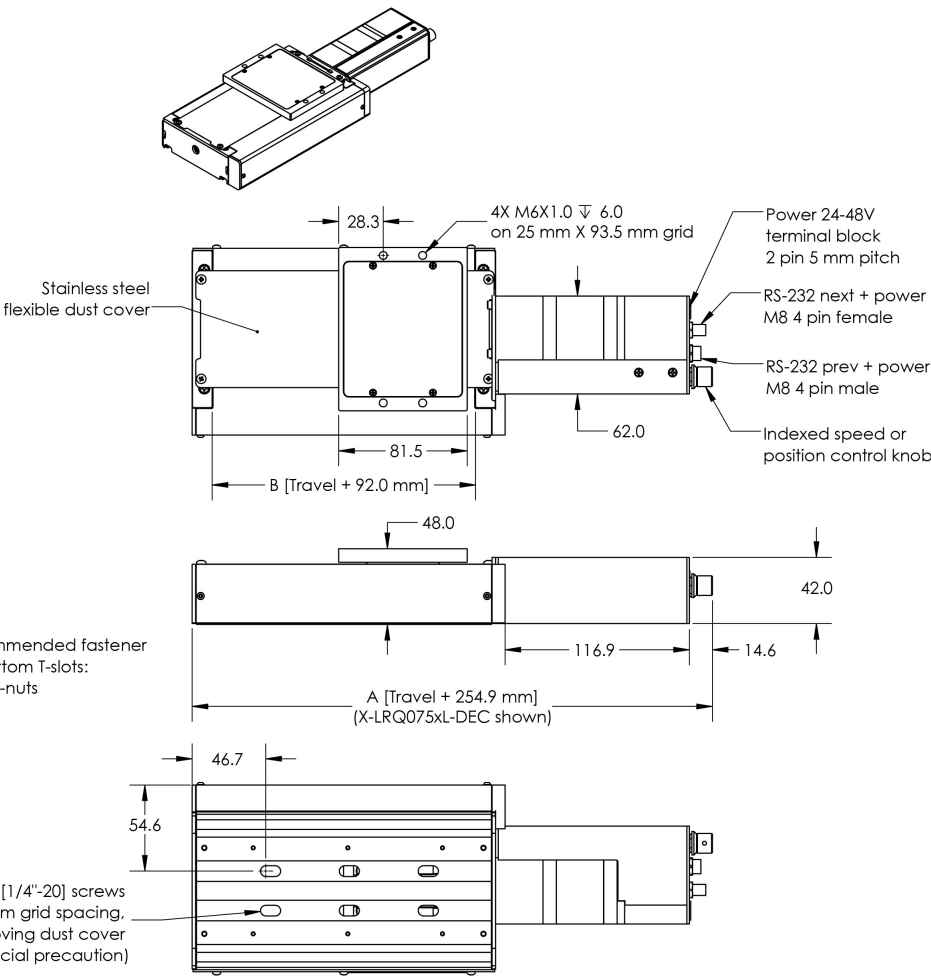

DWG 1455 R01


X-LRQ075AL-DE51C Specifications

Specification	Value	Alternate Unit
Microstep Size (Default Resolution)	0.09921875 μm	
Built-in Controller	Yes	
Travel Range	75 mm	2.953"
Accuracy (unidirectional)	10 μm	0.000394"
Repeatability	< 2.5 μm	< 0.000098"
Backlash	< 5 μm	< 0.000197"
Maximum Speed	54 mm/s	2.126"/s
Minimum Speed	0.000061 mm/s	0.000002"/s
Speed Resolution	0.000061 mm/s	0.000002"/s
Encoder Type	Linear quadrature encoder	
Encoder Resolution	50 nm	
Peak Thrust	230 N	51.6 lb
Back-driving Force	Non-back-driving	
Maximum Continuous Thrust	100 N	22.4 lb
Communication Interface	RS-232	
Communication Protocol	Zaber ASCII (Default), Zaber Binary	
Data Cable Connection	Locking 4-pin M8	
Maximum Centered Load	1000 N	224.3 lb
Maximum Cantilever Load	3000 N-cm	4248.4 oz-in
Guide Type	Recirculating Ball Linear Guide	
Vertical Runout	< 20 μm	< 0.000787"
Horizontal Runout	< 20 μm	< 0.000787"
Pitch	0.025°	0.436 mrad
Roll	0.01°	0.174 mrad
Yaw	0.02°	0.349 mrad
Stiffness in Pitch	640 N-m/°	27 $\mu\text{rad/N-m}$
Stiffness in Roll	1850 N-m/°	9 $\mu\text{rad/N-m}$
Stiffness in Yaw	665 N-m/°	26 $\mu\text{rad/N-m}$
Power Supply	24-48 VDC	
Power Plug	2-pin screw terminal	


Specification	Value	Alternate Unit
Maximum Current Draw	1900 mA	
Linear Motion Per Motor Rev	1.27 mm	0.050"
Motor Steps Per Rev	200	
Motor Type	Stepper (2 phase)	
Motor Rated Current	2300 mA/phase	
Inductance	2.8 mH/phase	
Default Resolution	1/64 of a step	
Mechanical Drive System	Precision lead screw	
Limit or Home Sensing	Magnetic home sensor	
Manual Control	Indexed knob with push switch	
Axes of Motion	1	
LED Indicators	Yes	
Mounting Interface	M6 and M3 threaded holes	
Operating Temperature Range	0 to 50 °C	
RoHS Compliant	Yes	
CE Compliant	Yes	
Vacuum Compatible	No	
Weight	2.51 kg	5.534 lb

X-LRQ-DEC Series Charts


Thrust Speed Performance

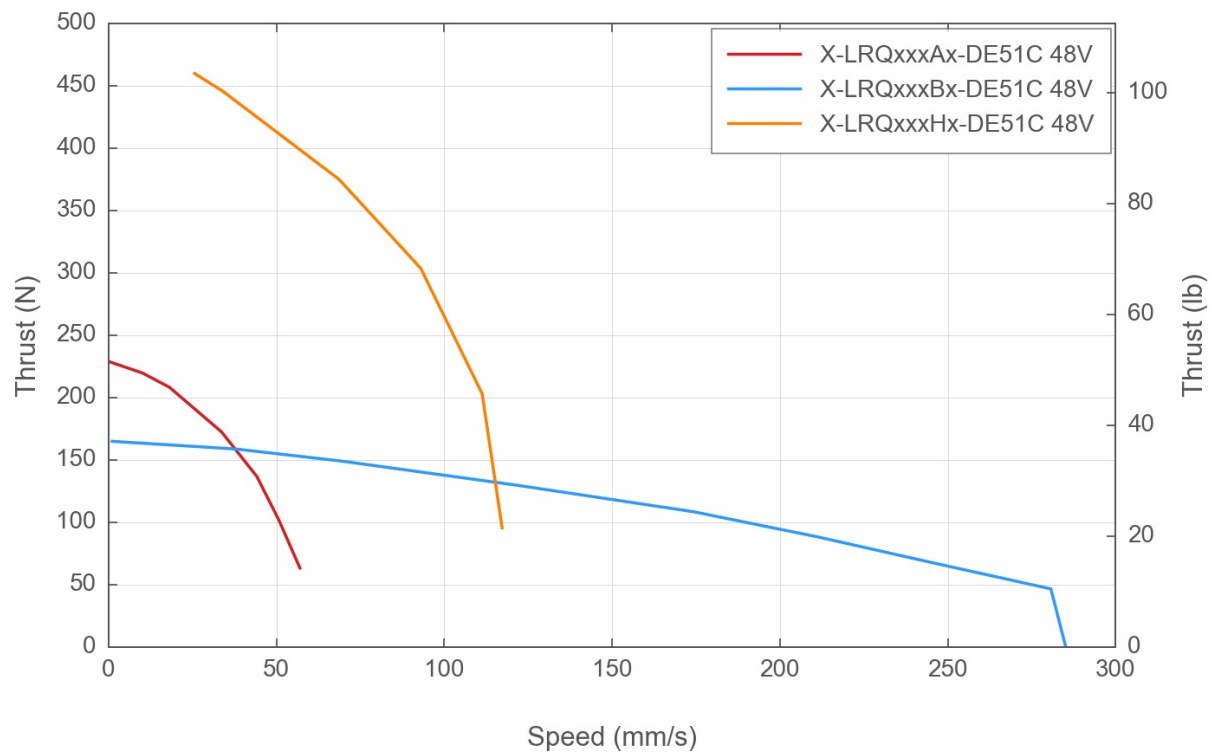


Thrust Speed Performance

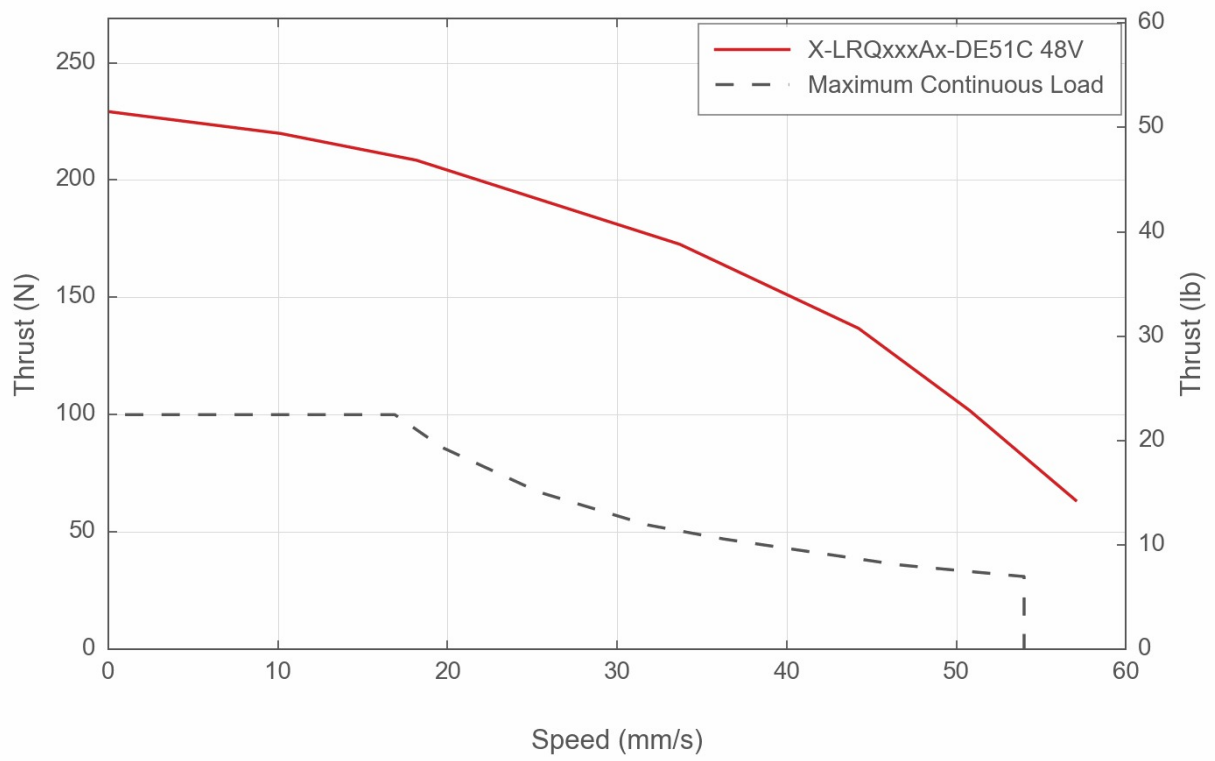


Thrust Speed Performance

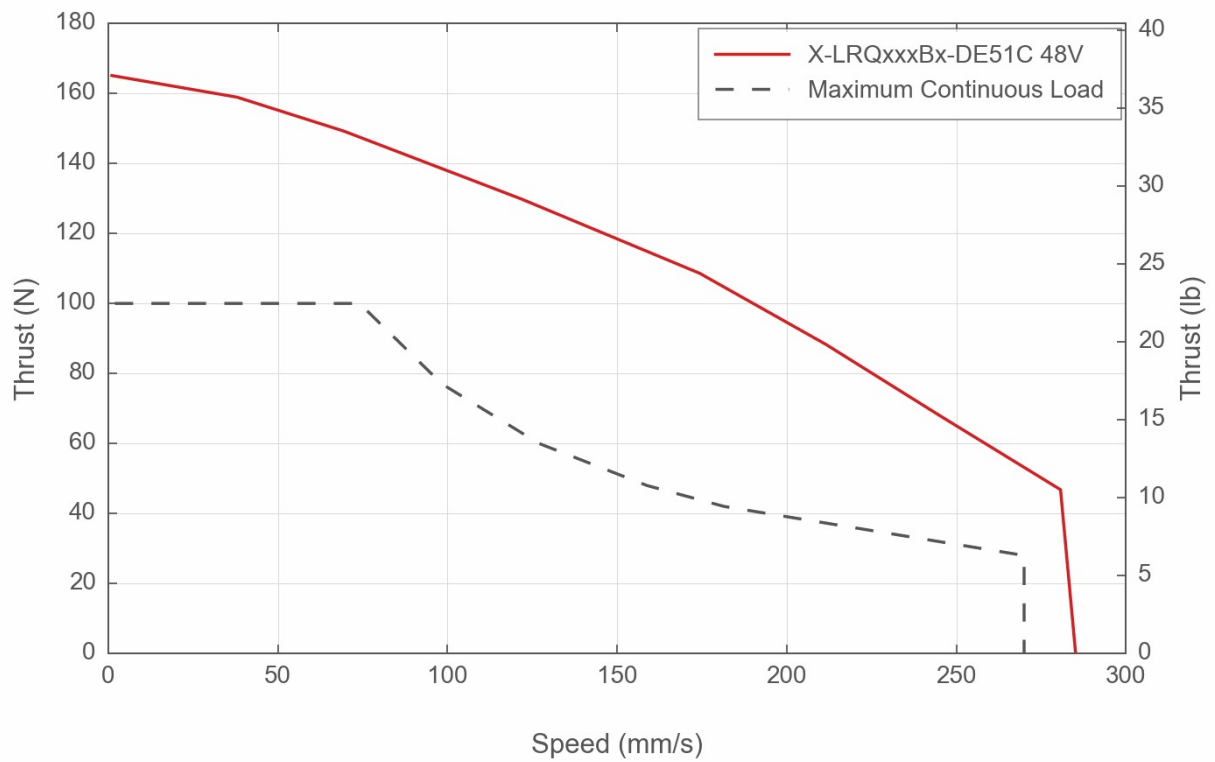


Thrust Speed Performance

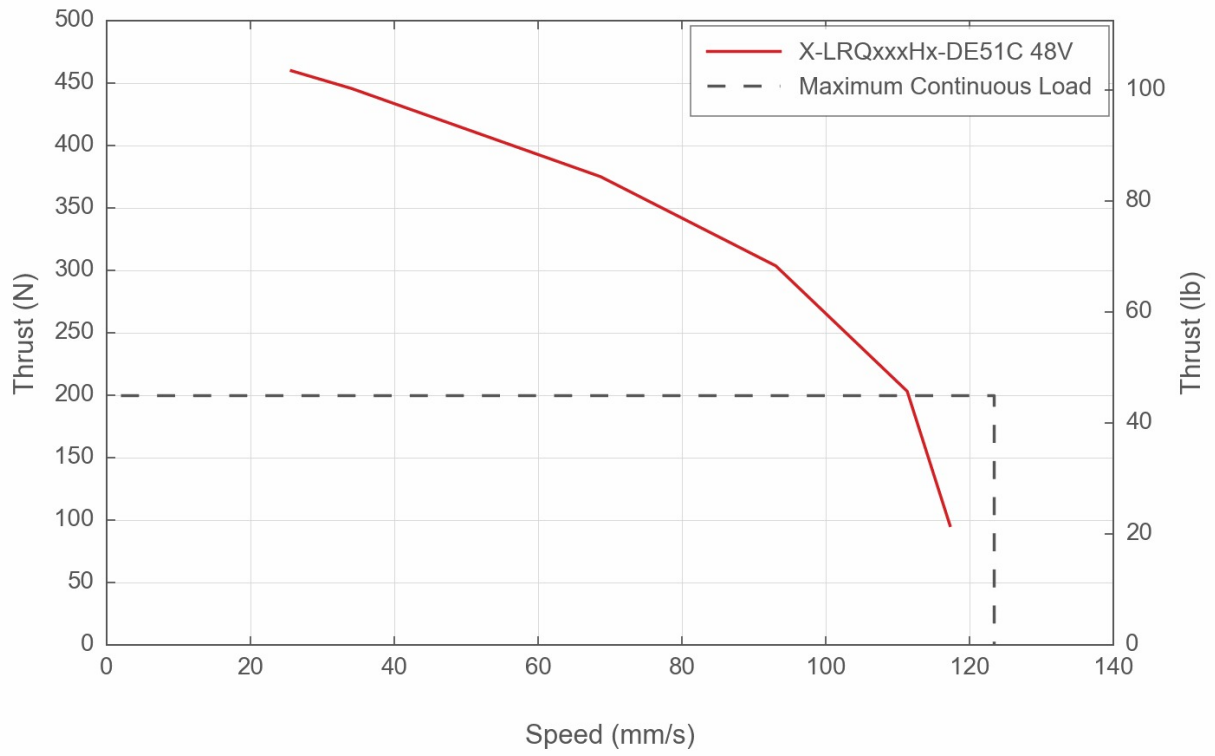

Typical Accuracy

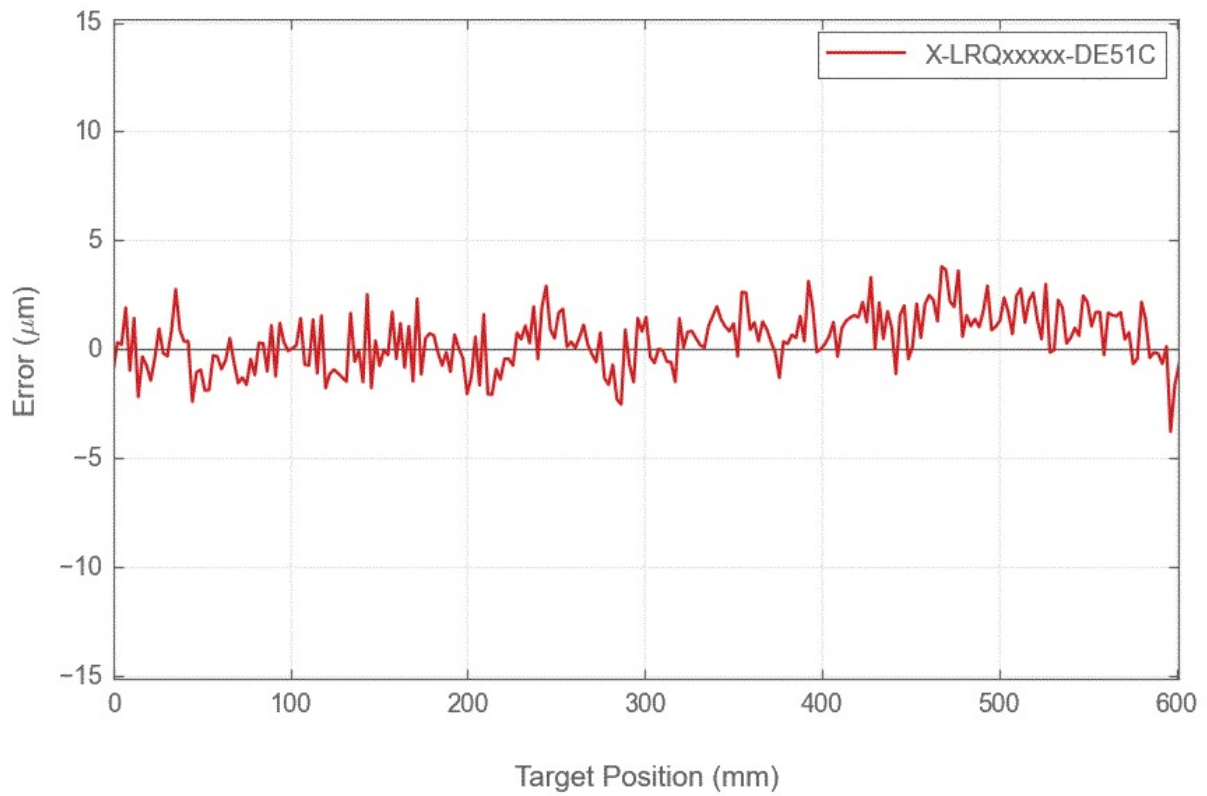

LRQ Linear Bearing Lifetime

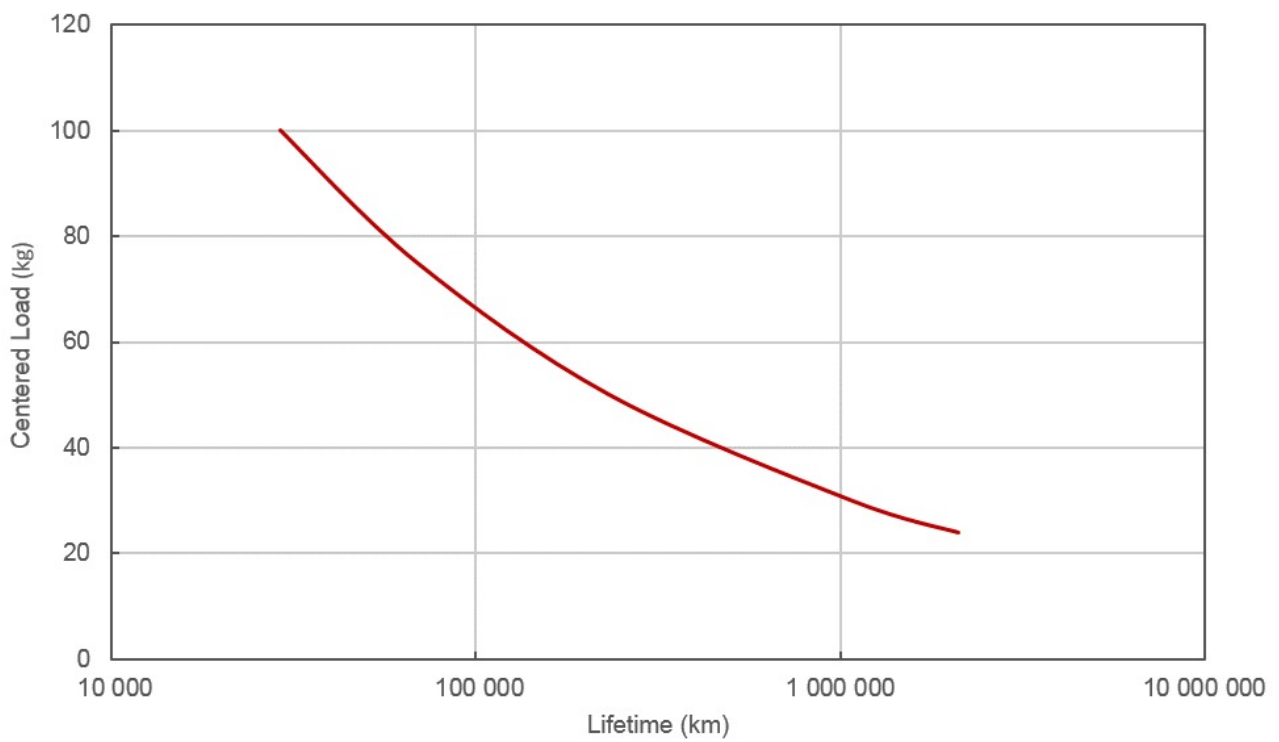

Contact

Email: contact@zaber.com

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>