

## LDM060C-AE54T10A Datasheet



- 60, 110, 210 mm travel options
- Up to 1.2 m/s speed and up to 3.5 g acceleration
- High repeatability (80 nm) and accuracy (1  $\mu$ m), with 4 nm minimum incremental move
- Direct position measurement from 1 nm resolution linear encoder
- Non-contact ironless linear motor for ultra-precision, high dynamic performance & reliability
- Designed for use with MCC controllers for coordinated multi-axis motion
- With AutoDetect, Zaber controllers automatically configure settings for the connected peripheral


## LDM-AE Series Overview

Zaber's LDM-AE Series devices are motorized linear stages suited for applications demanding outstanding precision, throughput, and reliability. A centrally mounted linear encoder results in 1  $\mu\text{m}$  position accuracy and consistent movement steps down to 4 nm. LDM-AE devices feature oversized ironless linear motors, providing high speed and acceleration, while minimizing heat generation to improve repeatability. Both the drive and encoder are non-contact and have no moving cables, resulting in an extremely robust system.

The stages are designed to connect directly to our MCC controllers using a single cable. Set-up is easy with AutoDetect. Once connected, the controller will automatically detect and configure the LDM-AE.

For more information visit: <https://www.zaber.com/products/linear-stages/LDM-AE>

## LDM-AE Series Part Numbering & Options

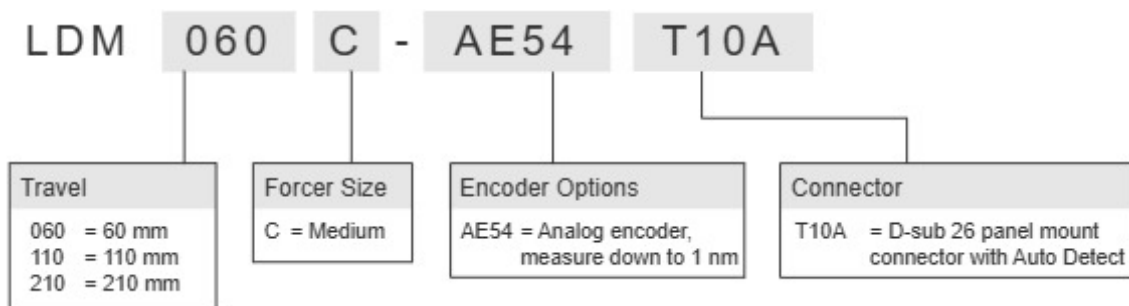

## LDM060C-AE54T10A Drawings

- [dimensions\\_LDM-AE \(Drawing for the LDM-AE\)](#)


## LDM060C-AE54T10A Specifications

<b>Built-in Controller</b>	
Recommended Controller	MCC (48 V) Recommended
AutoDetect	Yes
Travel Range	60 mm (2.362")
Accuracy (unidirectional)	1 $\mu\text{m}$ (0.000039")
Repeatability	< 0.08 $\mu\text{m}$ (< 0.000003")
Minimum Incremental Move	4 nm
Maximum Acceleration	34.3 m/s <sup>2</sup> (3.50 g)
Maximum Speed	1200 mm/s (47.244"/s)
Minimum Speed	0.61 nm/s
Speed Resolution	0.61 nm/s
Encoder Type	Linear analog encoder
Encoder Count Size	1 nm
Peak Thrust	100 N (22.4 lb)
Maximum Continuous Thrust	35 N (7.8 lb)
Maximum Centered Load	185 N (41.5 lb)
Maximum Moment (Pitch)	1200 N-cm (1699.3 oz-in)
Maximum Moment (Roll)	1200 N-cm (1699.3 oz-in)
Maximum Moment (Yaw)	1200 N-cm (1699.3 oz-in)
Vertical Runout	< 4 $\mu\text{m}$ (< 0.000157")
Horizontal Runout	< 3 $\mu\text{m}$ (< 0.000118")
Typical Velocity Stability	$\pm$ 0.11% at 100 mm/s with a 1.0 kg payload
Pitch	0.003° (0.052 mrad)
Roll	0.002° (0.035 mrad)
Yaw	0.002° (0.035 mrad)
Motor Type	Moving Magnet Track Linear Motor
Motor Rated Current	2400 mA/phase
Force Constant	15.8 N/A (3.5 lbs/A)
Motor Winding Resistance	6.4 ohms/phase
Inductance	1.24 mH/phase
Guide Type	Crossed-Roller Bearing


Built-in Controller	
Axes of Motion	1
Mounting Interface	M6 threaded holes
Moving Mass	1.74 kg (3.828 lbs)
Operating Temperature Range	0 to 50 °C
CE Compliant	Yes
Vacuum Compatible	No
Weight	3.73 kg (8.223 lb)

## LDM-AE Series Charts


### Typical Accuracy

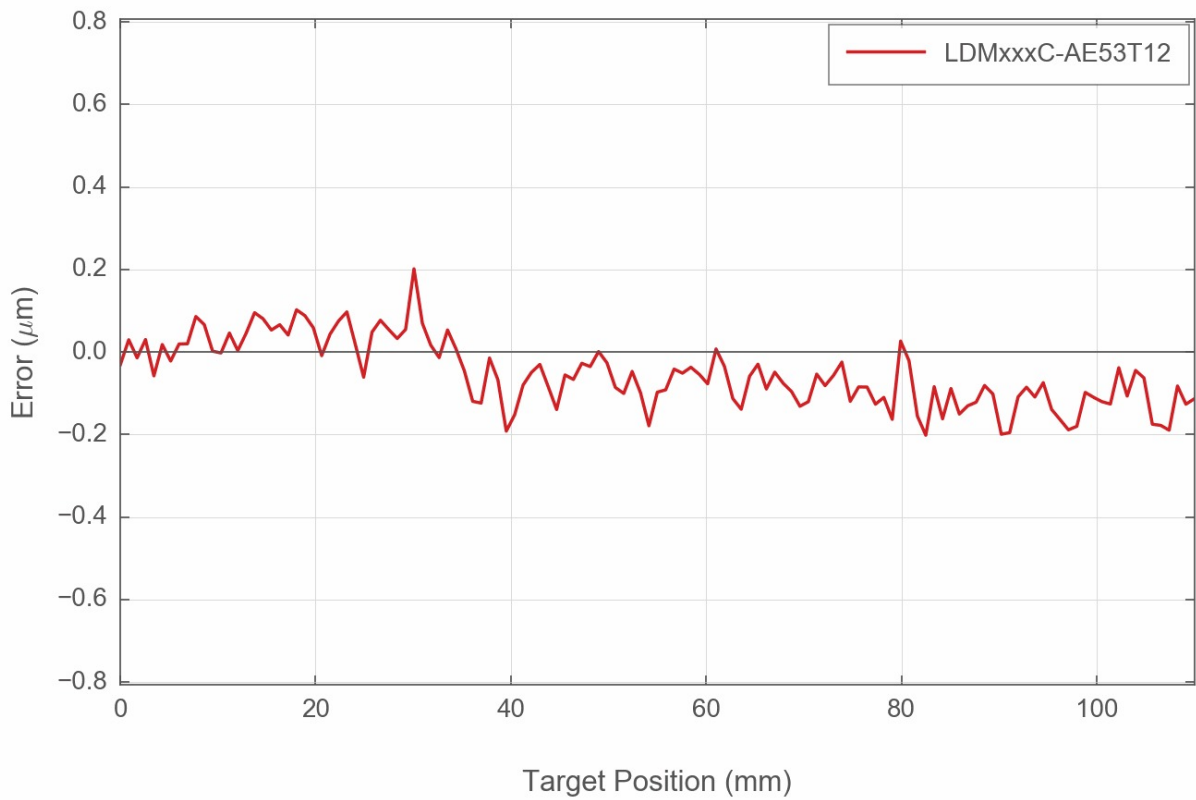

## Typical Minimum Incremental Move

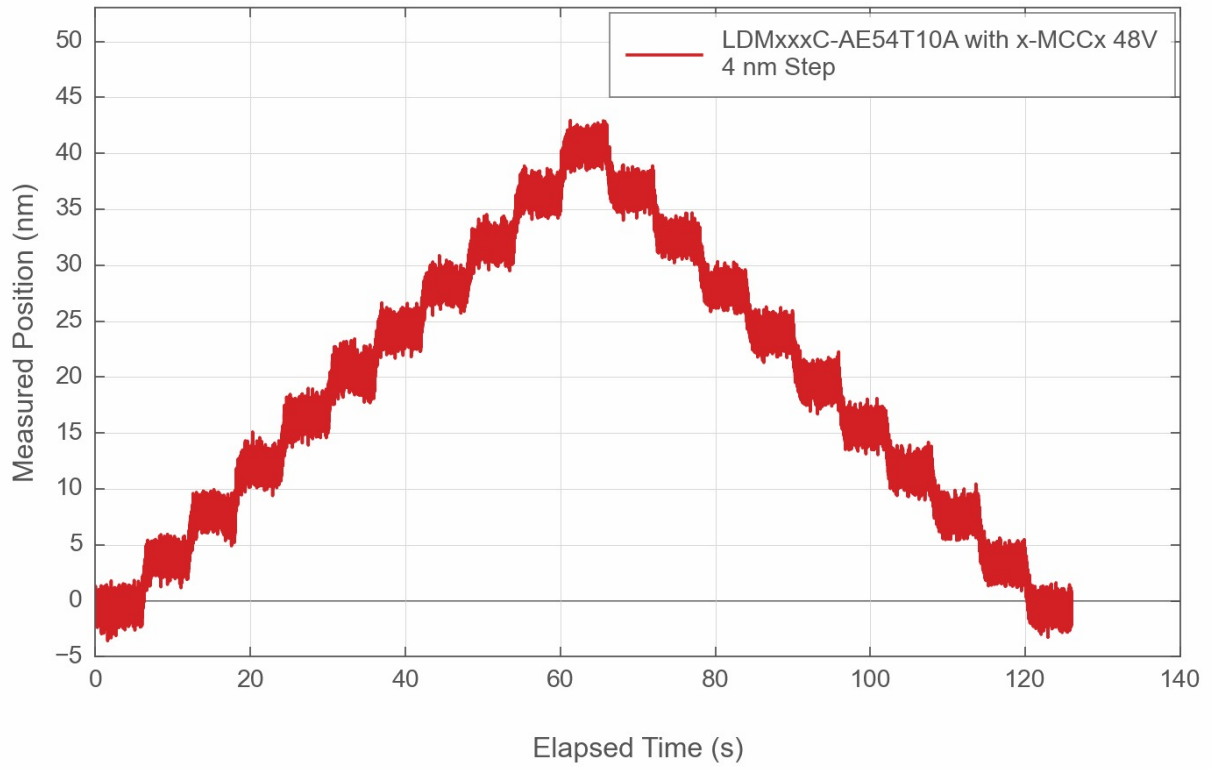

## Typical Velocity Stability and Following Error

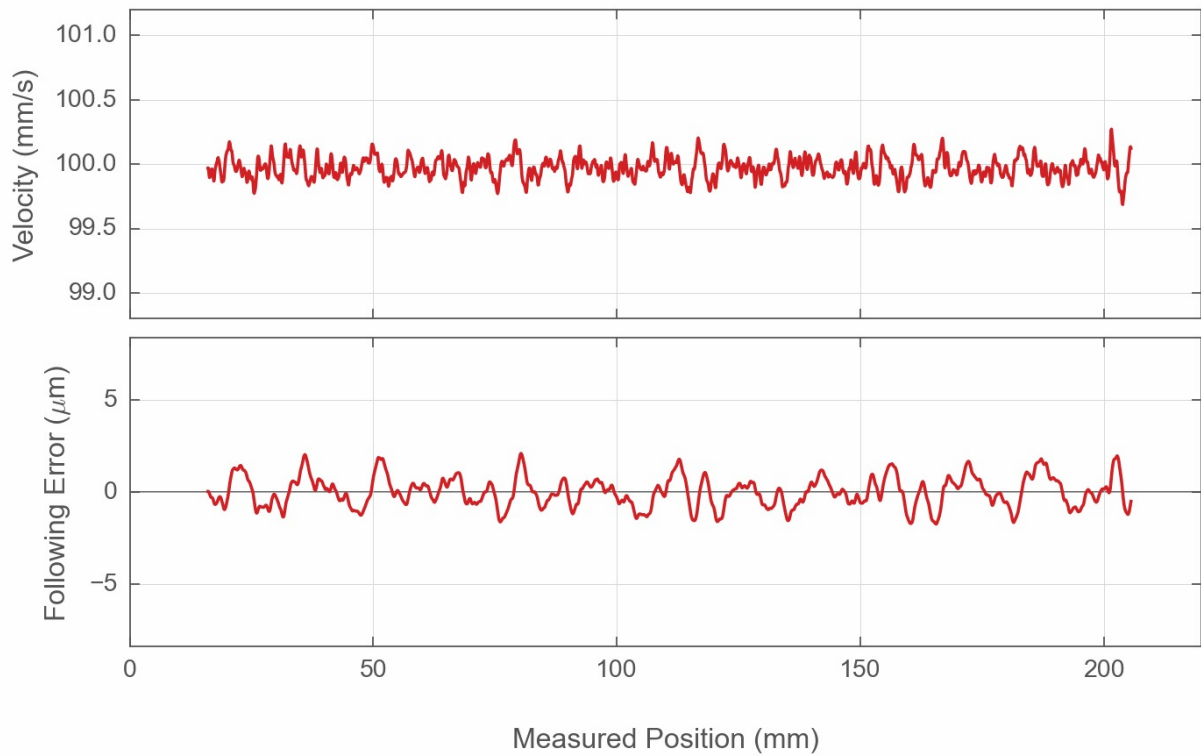

## Contact

Email: [contact@zaber.com](mailto:contact@zaber.com)

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>