

X-LRQ-EC Series Datasheet



- 75, 150, 300, 450, 600 mm travel
- Up to 840 mm/s speed and up to 300 N thrust
- 100 kg load capacity
- Inline and parallel drive configurations
- Ball screw and lead screw configurations
- Includes stainless steel dust cover
- Integrated, 500 CPR, motor mounted encoder provides slip/stall detection and recovery
- Built-in controller; daisy-chains with other Zaber products
- Custom versions available

X-LRQ-EC Series Overview

Zaber's X-LRQ-EC Series devices are computer-controlled, motorized linear stages with high stiffness, load, and lifetime capabilities in a compact size. Each device is available in either an inline or parallel drive configuration. A flexible stainless steel dust cover prevents the ingress of small objects. They are stand-alone units requiring only a standard 24 V or 48 V power supply. The built-in motor encoder allows closed-loop operation and slip/stall recovery features. An optional indexed knob provides convenient manual control for versatile operation even without a computer.

These stages connect to the RS-232 port or USB port of any computer, and they can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply. Convenient locking, 4-pin, M8 connectors on the unit allow for secure connection between units.

At only 48 mm high, these stages are excellent for applications where a low profile is required. The X-LRQ-EC's innovative design allows speeds up to 840 mm/s and loads up to 100 kg. Like all of Zaber's products, the X-LRQ-EC Series is designed to be 'plug and play' and very easy to set up and operate. These stages can bolt together into XY and XYZ systems. Some multi axis configurations may require additional accessories, please contact Zaber Technical Support to ensure the correct ones are selected.

For more information visit: <https://www.zaber.com/products/linear-stages/X-LRQ-EC>

X-LRQ-EC Series Part Numbering & Options



X-LRQ-EC Series Drawings

- [X-LRQxL-EC.png \(Dimension Drawing for the X-LRQxL-EC\)](#)
- [X-LRQxP-EC.png \(Dimension Drawing for the X-LRQxP-EC\)](#)

X-LRQ-EC Series Specifications

Built-in Controller	
Encoder Resolution	500 CPR (2000 states/rev)
Encoder Type	Rotary quadrature encoder
Communication Interface	RS-232
Communication Protocol	Zaber ASCII (Default), Zaber Binary
Data Cable Connection	Locking 4-pin M8
Maximum Centered Load	1000 N (224.3 lb)
Maximum Moment (Pitch)	30 N-m (22.1 ft-lb)
Maximum Moment (Roll)	30 N-m (22.1 ft-lb)
Maximum Moment (Yaw)	30 N-m (22.1 ft-lb)
Stiffness in Pitch	250 N-m/° (70 µrad/N-m)
Stiffness in Roll	600 N-m/° (29 µrad/N-m)
Stiffness in Yaw	430 N-m/° (41 µrad/N-m)
Power Supply	24-48 VDC
Power Plug	2-pin screw terminal
Maximum Current Draw	1900 mA
Motor Steps Per Rev	200
Motor Type	Stepper (2 phase)
Motor Rated Current	2300 mA/phase
Inductance	2.8 mH/phase
Default Resolution	1/64 of a step
Guide Type	Recirculating Ball Linear Guide
Limit or Home Sensing	Magnetic home sensor
Manual Control	Indexed knob with push switch
Axes of Motion	1
LED Indicators	Yes
Mounting Interface	M6 and M3 threaded holes
Operating Temperature Range	0 to 50 °C
CE Compliant	Yes
Vacuum Compatible	No

Part Number	Microstep Size (Default Resolution)	Travel Range	Accuracy (unidirectional)	Repeatability
X-LRQ075AL-E01C	0.09921875 µm	75 mm (2.953")	23 µm (0.000906")	< 3.5 µm (< 0.000138")
X-LRQ075BL-E01C	0.49609375 µm	75 mm (2.953")	23 µm (0.000906")	< 3.5 µm (< 0.000138")
X-LRQ075DL-E01C	1.984375 µm	75 mm (2.953")	108 µm (0.004252")	< 4 µm (< 0.000157")
X-LRQ075HL-E01C	0.1953125 µm	75 mm (2.953")	32.5 µm (0.001280")	< 5 µm (< 0.000197")
X-LRQ150AL-E01C	0.09921875 µm	150 mm (5.905")	45 µm (0.001772")	< 3.5 µm (< 0.000138")
X-LRQ150BL-E01C	0.49609375 µm	150 mm (5.905")	32 µm (0.001260")	< 3.5 µm (< 0.000138")
X-LRQ150DL-E01C	1.984375 µm	150 mm (5.905")	115 µm (0.004528")	< 4 µm (< 0.000157")
X-LRQ150HL-E01C	0.1953125 µm	150 mm (5.905")	45 µm (0.001772")	< 5 µm (< 0.000197")
X-LRQ300AL-E01C	0.09921875 µm	300 mm (11.811")	90 µm (0.003543")	< 3.5 µm (< 0.000138")
X-LRQ300BL-E01C	0.49609375 µm	300 mm (11.811")	43 µm (0.001693")	< 3.5 µm (< 0.000138")
X-LRQ300DL-E01C	1.984375 µm	300 mm (11.811")	130 µm (0.005118")	< 4 µm (< 0.000157")
X-LRQ300HL-E01C	0.1953125 µm	300 mm (11.811")	70 µm (0.002756")	< 5 µm (< 0.000197")
X-LRQ450AL-E01C	0.09921875 µm	450 mm (17.716")	135 µm (0.005315")	< 3.5 µm (< 0.000138")
X-LRQ450BL-E01C	0.49609375 µm	450 mm (17.716")	68 µm (0.002677")	< 3.5 µm (< 0.000138")
X-LRQ450DL-E01C	1.984375 µm	450 mm (17.716")	145 µm (0.005709")	< 4 µm (< 0.000157")
X-LRQ450HL-E01C	0.1953125 µm	450 mm (17.716")	100 µm (0.003937")	< 5 µm (< 0.000197")
X-LRQ600AL-E01C	0.09921875 µm	600 mm (23.622")	150 µm (0.005905")	< 3.5 µm (< 0.000138")
X-LRQ600BL-E01C	0.49609375 µm	600 mm (23.622")	98 µm (0.003858")	< 3.5 µm (< 0.000138")
X-LRQ600DL-E01C	1.984375 µm	600 mm (23.622")	160 µm (0.006299")	< 4 µm (< 0.000157")
X-LRQ600HL-E01C	0.1953125 µm	600 mm (23.622")	130 µm (0.005118")	< 5 µm (< 0.000197")
X-LRQ075AP-E01C	0.09921875 µm	75 mm (2.953")	23 µm (0.000906")	< 3.5 µm (< 0.000138")

23 µm < 3.5 µm

Part Number	Microstep Size (Default Resolution)	Travel Range	Accuracy (unidirectional)	Repeatability
X-LRQ075BP-E01C	0.49609375 µm	75 mm (2.953")	(0.000906")	(< 0.000138")
X-LRQ075DP-E01C	1.984375 µm	75 mm (2.953")	108 µm (0.004252")	< 4 µm (< 0.000157")
X-LRQ075HP-E01C	0.1953125 µm	75 mm (2.953")	42.5 µm (0.001673")	< 5 µm (< 0.000197")
X-LRQ150AP-E01C	0.09921875 µm	150 mm (5.905")	45 µm (0.001772")	< 3.5 µm (< 0.000138")
X-LRQ150BP-E01C	0.49609375 µm	150 mm (5.905")	32 µm (0.001260")	< 3.5 µm (< 0.000138")
X-LRQ150DP-E01C	1.984375 µm	150 mm (5.905")	115 µm (0.004528")	< 4 µm (< 0.000157")
X-LRQ150HP-E01C	0.1953125 µm	150 mm (5.905")	55 µm (0.002165")	< 5 µm (< 0.000197")
X-LRQ300AP-E01C	0.09921875 µm	300 mm (11.811")	90 µm (0.003543")	< 3.5 µm (< 0.000138")
X-LRQ300BP-E01C	0.49609375 µm	300 mm (11.811")	43 µm (0.001693")	< 3.5 µm (< 0.000138")
X-LRQ300DP-E01C	1.984375 µm	300 mm (11.811")	130 µm (0.005118")	< 4 µm (< 0.000157")
X-LRQ300HP-E01C	0.1953125 µm	300 mm (11.811")	80 µm (0.003150")	< 5 µm (< 0.000197")
X-LRQ450AP-E01C	0.09921875 µm	450 mm (17.716")	135 µm (0.005315")	< 3.5 µm (< 0.000138")
X-LRQ450BP-E01C	0.49609375 µm	450 mm (17.716")	68 µm (0.002677")	< 3.5 µm (< 0.000138")
X-LRQ450DP-E01C	1.984375 µm	450 mm (17.716")	145 µm (0.005709")	< 4 µm (< 0.000157")
X-LRQ450HP-E01C	0.1953125 µm	450 mm (17.716")	110 µm (0.004331")	< 5 µm (< 0.000197")
X-LRQ600AP-E01C	0.09921875 µm	600 mm (23.622")	150 µm (0.005905")	< 3.5 µm (< 0.000138")
X-LRQ600BP-E01C	0.49609375 µm	600 mm (23.622")	98 µm (0.003858")	< 3.5 µm (< 0.000138")
X-LRQ600DP-E01C	1.984375 µm	600 mm (23.622")	160 µm (0.006299")	< 4 µm (< 0.000157")
X-LRQ600HP-E01C	0.1953125 µm	600 mm (23.622")	140 µm (0.005512")	< 5 µm (< 0.000197")

Part Number	Backlash	Maximum Speed	Minimum Speed	Speed Resolution
-------------	----------	---------------	---------------	------------------

Part Number	Backlash	Maximum Speed	Minimum Speed	Speed Resolution
X-LRQ075AL-E01C	< 16 μm (< 0.000630")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ075BL-E01C	< 25 μm (< 0.000984")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ075DL-E01C	< 80 μm (< 0.003150")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ075HL-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ150AL-E01C	< 16 μm (< 0.000630")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ150BL-E01C	< 25 μm (< 0.000984")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ150DL-E01C	< 80 μm (< 0.003150")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ150HL-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ300AL-E01C	< 16 μm (< 0.000630")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ300BL-E01C	< 25 μm (< 0.000984")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ300DL-E01C	< 80 μm (< 0.003150")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ300HL-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ450AL-E01C	< 16 μm (< 0.000630")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ450BL-E01C	< 25 μm (< 0.000984")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ450DL-E01C	< 80 μm (< 0.003150")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ450HL-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ600AL-E01C	< 16 μm (< 0.000630")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ600BL-E01C	< 25 μm (< 0.000984")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ600DL-E01C	< 80 μm (< 0.003150")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ600HL-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ075AP-E01C	< 20 μm (< 0.000787")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)

Part Number	Backlash	Maximum Speed	Minimum Speed	Speed Resolution
X-LRQ075BP-E01C	< 31 μm (< 0.001220")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ075DP-E01C	< 130 μm (< 0.005118")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ075HP-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ150AP-E01C	< 20 μm (< 0.000787")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ150BP-E01C	< 31 μm (< 0.001220")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ150DP-E01C	< 130 μm (< 0.005118")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ150HP-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ300AP-E01C	< 20 μm (< 0.000787")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ300BP-E01C	< 31 μm (< 0.001220")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ300DP-E01C	< 130 μm (< 0.005118")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ300HP-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ450AP-E01C	< 20 μm (< 0.000787")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ450BP-E01C	< 31 μm (< 0.001220")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ450DP-E01C	< 130 μm (< 0.005118")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ450HP-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)
X-LRQ600AP-E01C	< 20 μm (< 0.000787")	54 mm/s (2.126"/s)	0.000061 mm/s (0.000002"/s)	0.000061 mm/s (0.000002"/s)
X-LRQ600BP-E01C	< 31 μm (< 0.001220")	270 mm/s (10.630"/s)	0.000303 mm/s (0.000012"/s)	0.000303 mm/s (0.000012"/s)
X-LRQ600DP-E01C	< 130 μm (< 0.005118")	840 mm/s (33.071"/s)	0.001212 mm/s (0.000048"/s)	0.001212 mm/s (0.000048"/s)
X-LRQ600HP-E01C	< 30 μm (< 0.001181")	110 mm/s (4.331"/s)	0.000119 mm/s (0.000005"/s)	0.000119 mm/s (0.000005"/s)

Part Number	Peak Thrust	Back-driving Force*	Maximum Continuous Thrust	Vertical Runout
				< 20 μm

Part Number	Peak Thrust	Back-driving Force*	Maximum Continuous Thrust	Vertical Runout
X-LRQ075AL-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	(< 0.000787")
X-LRQ075BL-E01C	150 N (33.6 lb)	(± 30%) 106 N (23.8 lb)	100 N (22.4 lb)	< 20 µm (< 0.000787")
X-LRQ075DL-E01C	35 N (7.8 lb)	(± 30%) 27 N (6.1 lb)	25 N (5.6 lb)	< 20 µm (< 0.000787")
X-LRQ075HL-E01C	500 N (112.1 lb)	(± 30%) 106 N (23.8 lb)	200 N (44.9 lb)	< 20 µm (< 0.000787")
X-LRQ150AL-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 25 µm (< 0.000984")
X-LRQ150BL-E01C	150 N (33.6 lb)	(± 30%) 106 N (23.8 lb)	100 N (22.4 lb)	< 25 µm (< 0.000984")
X-LRQ150DL-E01C	35 N (7.8 lb)	(± 30%) 27 N (6.1 lb)	25 N (5.6 lb)	< 25 µm (< 0.000984")
X-LRQ150HL-E01C	500 N (112.1 lb)	(± 30%) 106 N (23.8 lb)	200 N (44.9 lb)	< 25 µm (< 0.000984")
X-LRQ300AL-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 35 µm (< 0.001378")
X-LRQ300BL-E01C	150 N (33.6 lb)	(± 30%) 106 N (23.8 lb)	100 N (22.4 lb)	< 35 µm (< 0.001378")
X-LRQ300DL-E01C	35 N (7.8 lb)	(± 30%) 27 N (6.1 lb)	25 N (5.6 lb)	< 35 µm (< 0.001378")
X-LRQ300HL-E01C	500 N (112.1 lb)	(± 30%) 106 N (23.8 lb)	200 N (44.9 lb)	< 35 µm (< 0.001378")
X-LRQ450AL-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 45 µm (< 0.001772")
X-LRQ450BL-E01C	150 N (33.6 lb)	(± 30%) 106 N (23.8 lb)	100 N (22.4 lb)	< 45 µm (< 0.001772")
X-LRQ450DL-E01C	35 N (7.8 lb)	(± 30%) 27 N (6.1 lb)	25 N (5.6 lb)	< 45 µm (< 0.001772")
X-LRQ450HL-E01C	500 N (112.1 lb)	(± 30%) 106 N (23.8 lb)	200 N (44.9 lb)	< 45 µm (< 0.001772")
X-LRQ600AL-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 75 µm (< 0.002953")
X-LRQ600BL-E01C	150 N (33.6 lb)	(± 30%) 106 N (23.8 lb)	100 N (22.4 lb)	< 75 µm (< 0.002953")
X-LRQ600DL-E01C	35 N (7.8 lb)	(± 30%) 27 N (6.1 lb)	25 N (5.6 lb)	< 75 µm (< 0.002953")
X-LRQ600HL-E01C	500 N (112.1 lb)	(± 30%) 106 N (23.8 lb)	200 N (44.9 lb)	< 75 µm (< 0.002953")
X-LRQ075AP-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 20 µm (< 0.000787")

Part Number	Peak Thrust	Back-driving Force*	Maximum Continuous Thrust	Vertical Runout
X-LRQ075BP-E01C	150 N (33.6 lb)	(± 30%) 136 N (30.5 lb)	100 N (22.4 lb)	< 20 µm (< 0.000787")
X-LRQ075DP-E01C	35 N (7.8 lb)	(± 30%) 58 N (13.0 lb)	25 N (5.6 lb)	< 20 µm (< 0.000787")
X-LRQ075HP-E01C	500 N (112.1 lb)	(± 30%) 136 N (30.5 lb)	200 N (44.9 lb)	< 20 µm (< 0.000787")
X-LRQ150AP-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 25 µm (< 0.000984")
X-LRQ150BP-E01C	150 N (33.6 lb)	(± 30%) 136 N (30.5 lb)	100 N (22.4 lb)	< 25 µm (< 0.000984")
X-LRQ150DP-E01C	35 N (7.8 lb)	(± 30%) 58 N (13.0 lb)	25 N (5.6 lb)	< 25 µm (< 0.000984")
X-LRQ150HP-E01C	500 N (112.1 lb)	(± 30%) 136 N (30.5 lb)	200 N (44.9 lb)	< 25 µm (< 0.000984")
X-LRQ300AP-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 35 µm (< 0.001378")
X-LRQ300BP-E01C	150 N (33.6 lb)	(± 30%) 136 N (30.5 lb)	100 N (22.4 lb)	< 35 µm (< 0.001378")
X-LRQ300DP-E01C	35 N (7.8 lb)	(± 30%) 58 N (13.0 lb)	25 N (5.6 lb)	< 35 µm (< 0.001378")
X-LRQ300HP-E01C	500 N (112.1 lb)	(± 30%) 136 N (30.5 lb)	200 N (44.9 lb)	< 35 µm (< 0.001378")
X-LRQ450AP-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 45 µm (< 0.001772")
X-LRQ450BP-E01C	150 N (33.6 lb)	(± 30%) 136 N (30.5 lb)	100 N (22.4 lb)	< 45 µm (< 0.001772")
X-LRQ450DP-E01C	35 N (7.8 lb)	(± 30%) 58 N (13.0 lb)	25 N (5.6 lb)	< 45 µm (< 0.001772")
X-LRQ450HP-E01C	500 N (112.1 lb)	(± 30%) 136 N (30.5 lb)	200 N (44.9 lb)	< 45 µm (< 0.001772")
X-LRQ600AP-E01C	230 N (51.6 lb)	Non-back-driving	100 N (22.4 lb)	< 75 µm (< 0.002953")
X-LRQ600BP-E01C	150 N (33.6 lb)	(± 30%) 136 N (30.5 lb)	100 N (22.4 lb)	< 75 µm (< 0.002953")
X-LRQ600DP-E01C	35 N (7.8 lb)	(± 30%) 58 N (13.0 lb)	25 N (5.6 lb)	< 75 µm (< 0.002953")
X-LRQ600HP-E01C	500 N (112.1 lb)	(± 30%) 136 N (30.5 lb)	200 N (44.9 lb)	< 75 µm (< 0.002953")

Part Number	Horizontal Runout	Pitch	Roll	Yaw
	< 20 µm	0.025°	0.01°	0.02°

Part Number	Horizontal Runout	Pitch	Roll	Yaw
X-LRQ075AL-E01C	(< 0.000787")	(0.436 mrad)	(0.174 mrad)	(0.349 mrad)
X-LRQ075BL-E01C	< 20 μm (< 0.000787")	0.025° (0.436 mrad)	0.01° (0.174 mrad)	0.02° (0.349 mrad)
X-LRQ075DL-E01C	< 20 μm (< 0.000787")	0.025° (0.436 mrad)	0.01° (0.174 mrad)	0.02° (0.349 mrad)
X-LRQ075HL-E01C	< 20 μm (< 0.000787")	0.025° (0.436 mrad)	0.01° (0.174 mrad)	0.02° (0.349 mrad)
X-LRQ150AL-E01C	< 20 μm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ150BL-E01C	< 20 μm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ150DL-E01C	< 20 μm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ150HL-E01C	< 20 μm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ300AL-E01C	< 30 μm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ300BL-E01C	< 30 μm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ300DL-E01C	< 30 μm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ300HL-E01C	< 30 μm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ450AL-E01C	< 40 μm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ450BL-E01C	< 40 μm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ450DL-E01C	< 40 μm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ450HL-E01C	< 40 μm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ600AL-E01C	< 60 μm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ600BL-E01C	< 60 μm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ600DL-E01C	< 60 μm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ600HL-E01C	< 60 μm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ075AP-E01C	< 20 μm (< 0.000787")	0.025° (0.436 mrad)	0.01° (0.174 mrad)	0.02° (0.349 mrad)
X-LRQ075BP-E01C	< 20 μm	0.025°	0.01°	0.02°


Part Number	Horizontal Runout	Pitch	Roll	Yaw
	(< 0.000787")	(0.436 mrad)	(0.174 mrad)	(0.349 mrad)
X-LRQ075DP-E01C	< 20 µm (< 0.000787")	0.025° (0.436 mrad)	0.01° (0.174 mrad)	0.02° (0.349 mrad)
X-LRQ075HP-E01C	< 20 µm (< 0.000787")	0.025° (0.436 mrad)	0.01° (0.174 mrad)	0.02° (0.349 mrad)
X-LRQ150AP-E01C	< 20 µm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ150BP-E01C	< 20 µm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ150DP-E01C	< 20 µm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ150HP-E01C	< 20 µm (< 0.000787")	0.03° (0.523 mrad)	0.015° (0.262 mrad)	0.02° (0.349 mrad)
X-LRQ300AP-E01C	< 30 µm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ300BP-E01C	< 30 µm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ300DP-E01C	< 30 µm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ300HP-E01C	< 30 µm (< 0.001181")	0.034° (0.593 mrad)	0.015° (0.262 mrad)	0.03° (0.523 mrad)
X-LRQ450AP-E01C	< 40 µm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ450BP-E01C	< 40 µm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ450DP-E01C	< 40 µm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ450HP-E01C	< 40 µm (< 0.001575")	0.04° (0.698 mrad)	0.025° (0.436 mrad)	0.04° (0.698 mrad)
X-LRQ600AP-E01C	< 60 µm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ600BP-E01C	< 60 µm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ600DP-E01C	< 60 µm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)
X-LRQ600HP-E01C	< 60 µm (< 0.002362")	0.045° (0.785 mrad)	0.035° (0.611 mrad)	0.04° (0.698 mrad)

Part Number	Linear Motion Per Motor Rev	Mechanical Drive System	Weight
X-LRQ075AL-E01C	1.27 mm (0.050")	Precision lead screw	2.38 kg (5.247 lb)


Part Number	Linear Motion Per Motor Rev	Mechanical Drive System	Weight
X-LRQ075BL-E01C	6.35 mm (0.250")	Precision lead screw	2.38 kg (5.247 lb)
X-LRQ075DL-E01C	25.4 mm (1.000")	Precision lead screw	2.38 kg (5.247 lb)
X-LRQ075HL-E01C	2.5 mm (0.098")	Precision ball screw	2.38 kg (5.247 lb)
X-LRQ150AL-E01C	1.27 mm (0.050")	Precision lead screw	2.76 kg (6.085 lb)
X-LRQ150BL-E01C	6.35 mm (0.250")	Precision lead screw	2.76 kg (6.085 lb)
X-LRQ150DL-E01C	25.4 mm (1.000")	Precision lead screw	2.76 kg (6.085 lb)
X-LRQ150HL-E01C	2.5 mm (0.098")	Precision ball screw	2.76 kg (6.085 lb)
X-LRQ300AL-E01C	1.27 mm (0.050")	Precision lead screw	3.67 kg (8.091 lb)
X-LRQ300BL-E01C	6.35 mm (0.250")	Precision lead screw	3.67 kg (8.091 lb)
X-LRQ300DL-E01C	25.4 mm (1.000")	Precision lead screw	3.67 kg (8.091 lb)
X-LRQ300HL-E01C	2.5 mm (0.098")	Precision ball screw	3.67 kg (8.091 lb)
X-LRQ450AL-E01C	1.27 mm (0.050")	Precision lead screw	4.48 kg (9.877 lb)
X-LRQ450BL-E01C	6.35 mm (0.250")	Precision lead screw	4.48 kg (9.877 lb)
X-LRQ450DL-E01C	25.4 mm (1.000")	Precision lead screw	4.48 kg (9.877 lb)
X-LRQ450HL-E01C	2.5 mm (0.098")	Precision ball screw	4.48 kg (9.877 lb)
X-LRQ600AL-E01C	1.27 mm (0.050")	Precision lead screw	5.26 kg (11.596 lb)
X-LRQ600BL-E01C	6.35 mm (0.250")	Precision lead screw	5.26 kg (11.596 lb)
X-LRQ600DL-E01C	25.4 mm (1.000")	Precision lead screw	5.26 kg (11.596 lb)
X-LRQ600HL-E01C	2.5 mm (0.098")	Precision ball screw	5.26 kg (11.596 lb)
X-LRQ075AP-E01C	1.27 mm (0.050")	Precision lead screw	2.54 kg (5.600 lb)
X-LRQ075BP-E01C	6.35 mm (0.250")	Precision lead screw	2.54 kg (5.600 lb)
X-LRQ075DP-E01C	25.4 mm (1.000")	Precision lead screw	2.54 kg (5.600 lb)
X-LRQ075HP-E01C	2.5 mm (0.098")	Precision ball screw	2.54 kg (5.600 lb)
X-LRQ150AP-E01C	1.27 mm (0.050")	Precision lead screw	2.92 kg (6.437 lb)
X-LRQ150BP-E01C	6.35 mm (0.250")	Precision lead screw	2.92 kg (6.437 lb)
X-LRQ150DP-E01C	25.4 mm (1.000")	Precision lead screw	2.92 kg (6.437 lb)
X-LRQ150HP-E01C	2.5 mm (0.098")	Precision ball screw	2.92 kg (6.437 lb)
X-LRQ300AP-E01C	1.27 mm (0.050")	Precision lead screw	3.83 kg (8.444 lb)
X-LRQ300BP-E01C	6.35 mm (0.250")	Precision lead screw	3.83 kg (8.444 lb)
X-LRQ300DP-E01C	25.4 mm (1.000")	Precision lead screw	3.83 kg (8.444 lb)
X-LRQ300HP-E01C	2.5 mm (0.098")	Precision ball screw	3.83 kg (8.444 lb)
X-LRQ450AP-E01C	1.27 mm (0.050")	Precision lead screw	4.64 kg (10.229 lb)
X-LRQ450BP-E01C	6.35 mm (0.250")	Precision lead screw	4.64 kg (10.229 lb)

Part Number	Linear Motion Per Motor Rev	Mechanical Drive System	Weight
X-LRQ450DP-E01C	25.4 mm (1.000")	Precision lead screw	4.64 kg (10.229 lb)
X-LRQ450HP-E01C	2.5 mm (0.098")	Precision ball screw	4.64 kg (10.229 lb)
X-LRQ600AP-E01C	1.27 mm (0.050")	Precision lead screw	5.42 kg (11.949 lb)
X-LRQ600BP-E01C	6.35 mm (0.250")	Precision lead screw	5.42 kg (11.949 lb)
X-LRQ600DP-E01C	25.4 mm (1.000")	Precision lead screw	5.42 kg (11.949 lb)
X-LRQ600HP-E01C	2.5 mm (0.098")	Precision ball screw	5.42 kg (11.949 lb)


X-LRQ-EC Series Charts

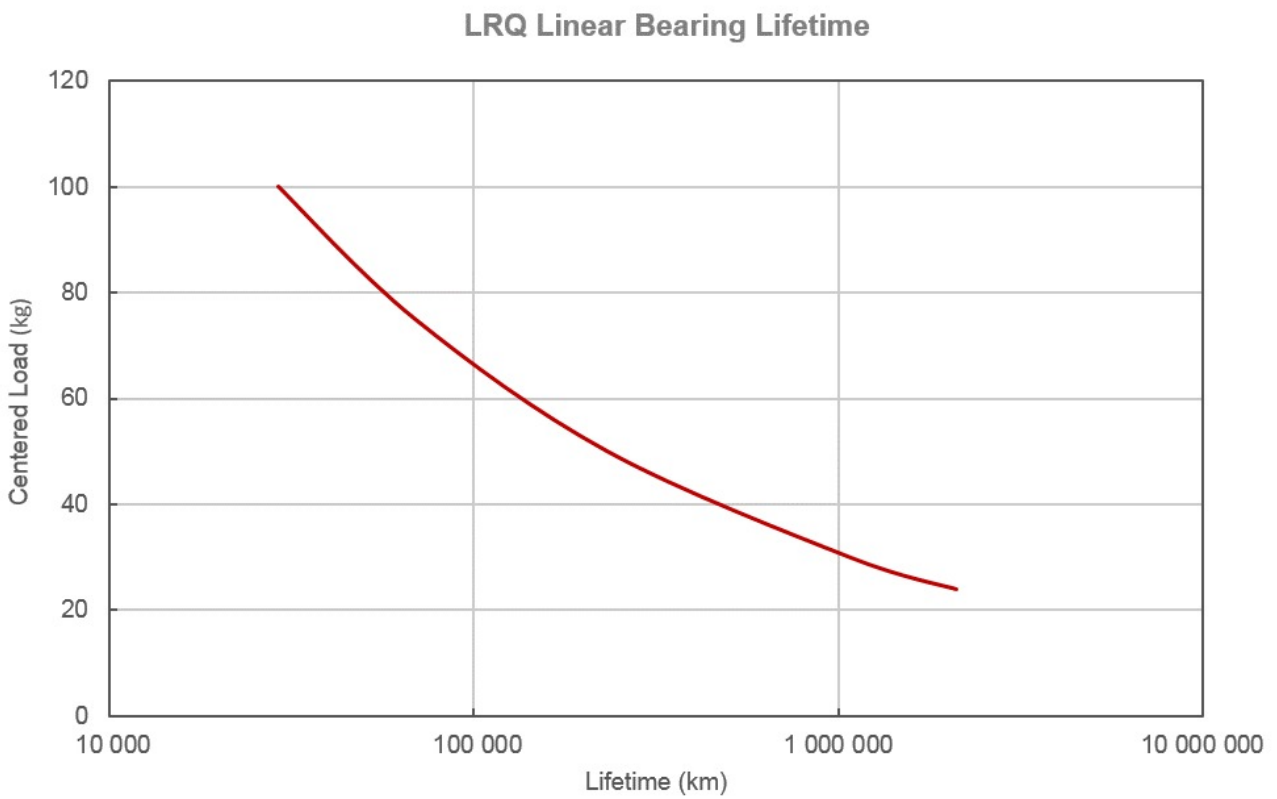


Thrust Speed Performance

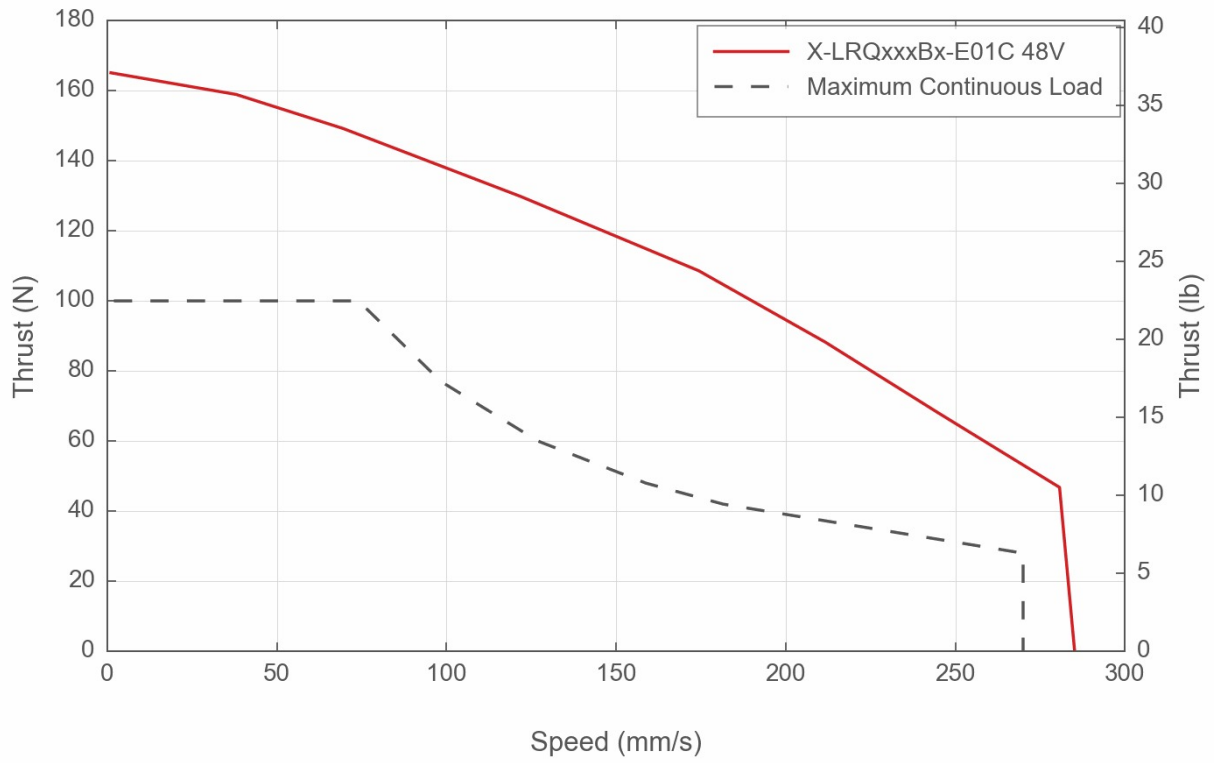


Thrust Speed Performance

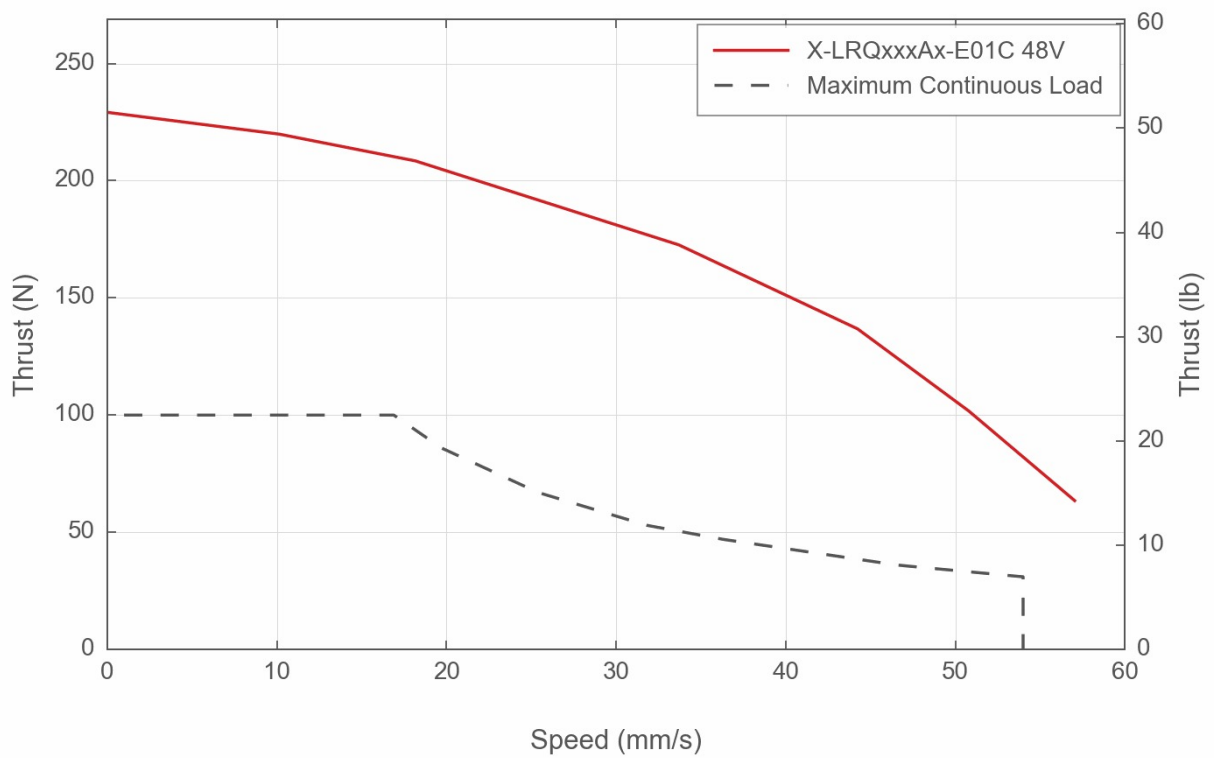


Thrust Speed Performance

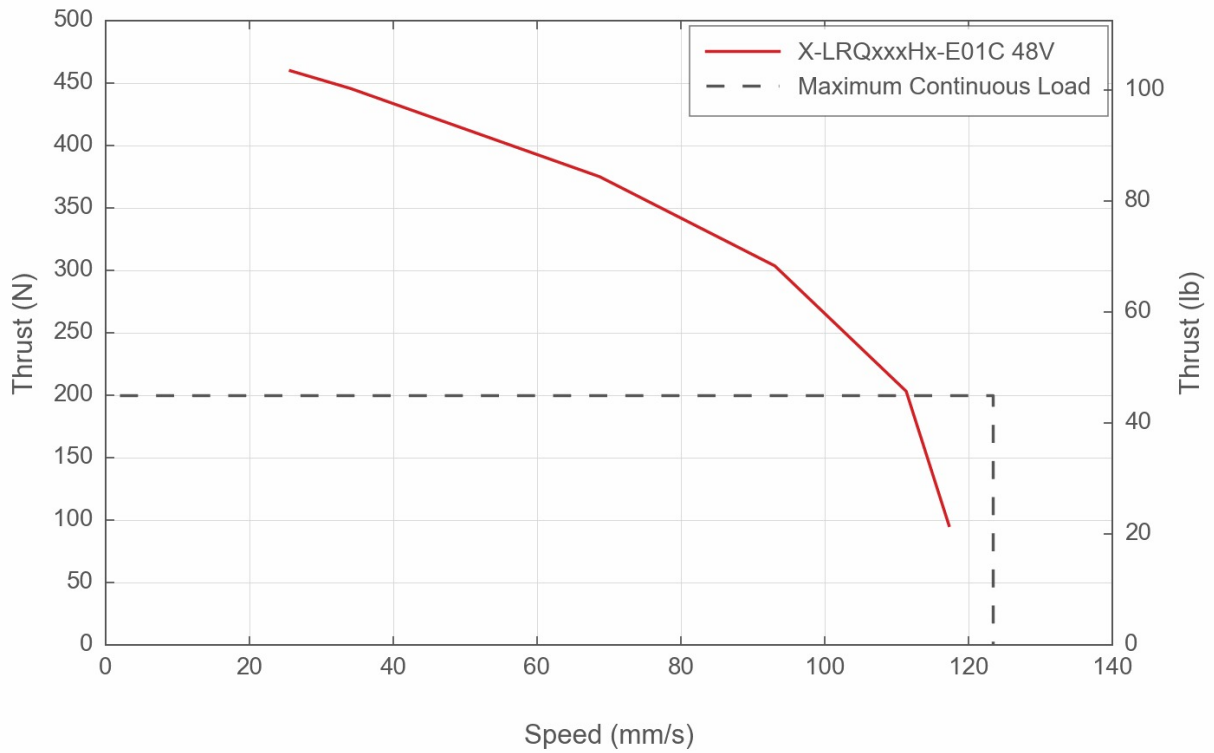

Thrust Speed Performance

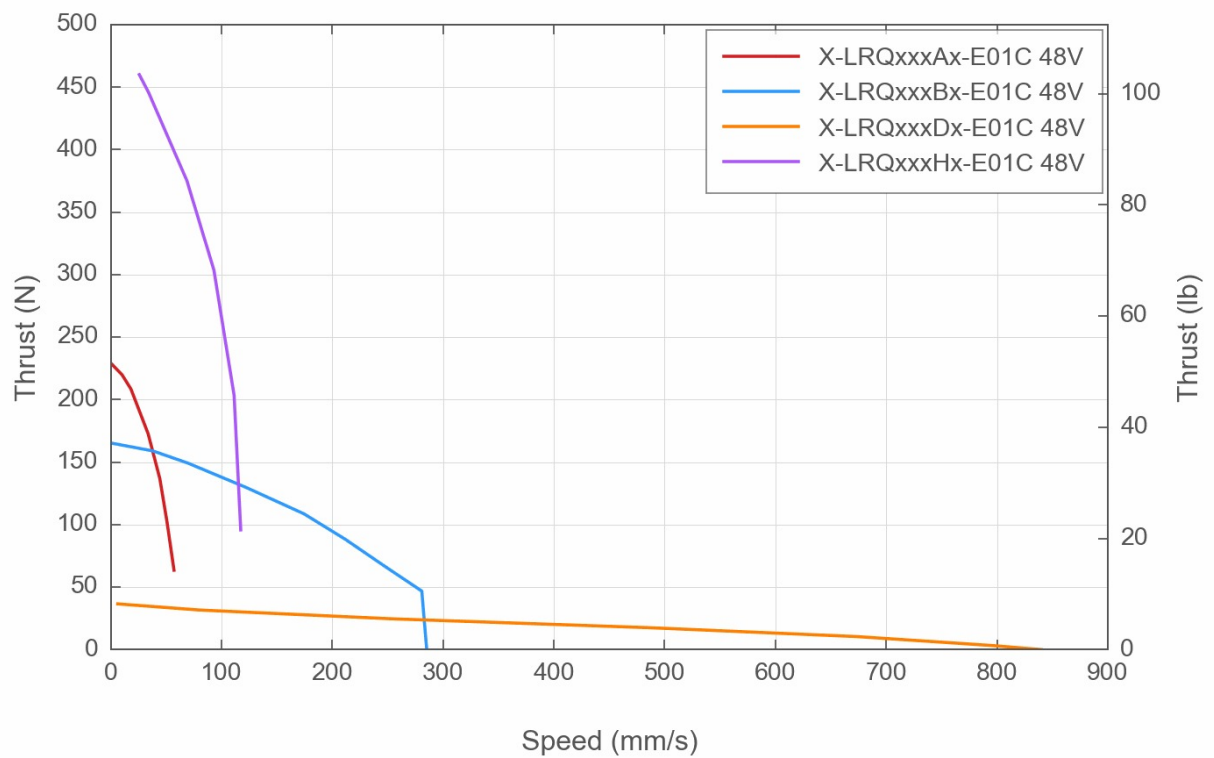

Thrust Speed Performance

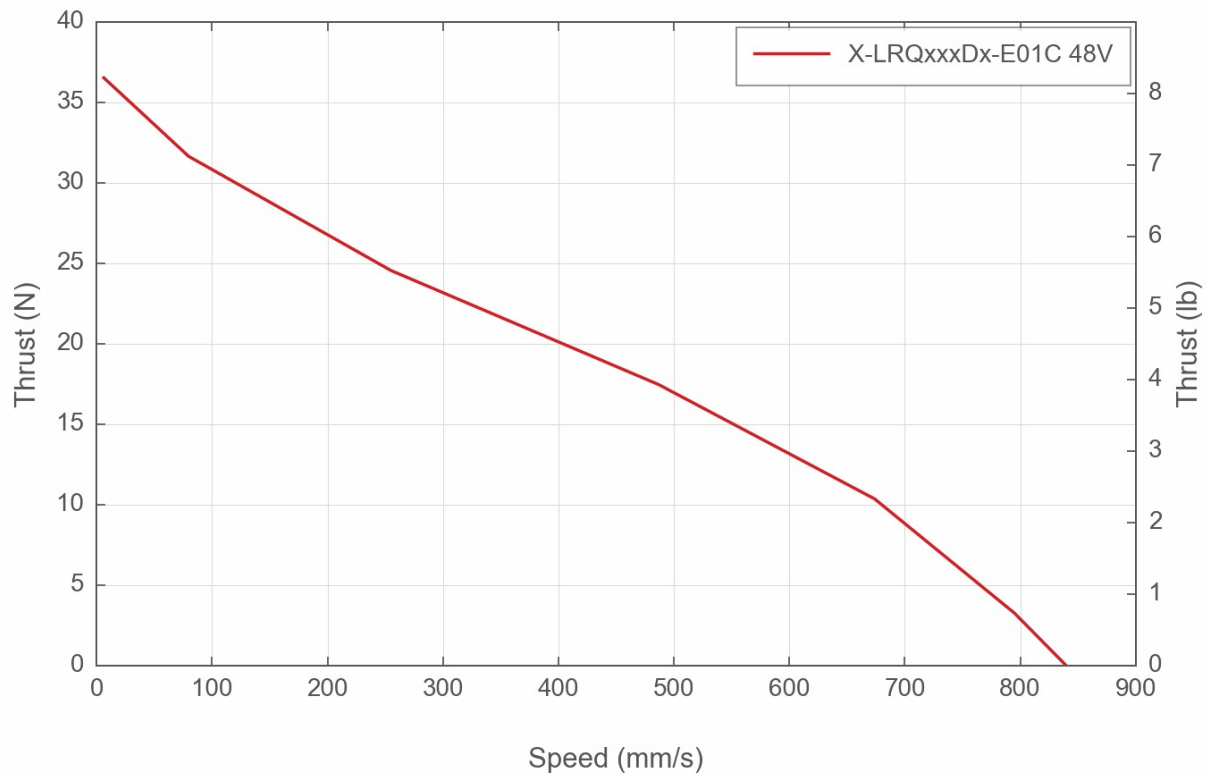

Contact

Email: contact@zaber.com

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>