

## VSR40A-T3A Datasheet



- 20 mm or 40 mm of travel
- Up to 55 mm/s speed and up to 200 N thrust
- 10 kg load capacity
- 55 or 85 mm retracted height
- Designed for use with MCC Family controllers or any 2-phase stepper motor controller
- With AutoDetect, Zaber controllers automatically configure settings for the connected peripheral


## VSR Series Overview

Zaber's VSR vertical lift stages are stepper actuator driven platforms capable of moving 10 kg loads. They deliver exceptional travel and load capacity for their compact sizes, measuring only 55 mm (VSR20) or 85 mm (VSR40) tall when closed. With small footprints these stages can also mount directly onto Zaber's LRT-C and LSQ series of linear stages.

The stages are designed to connect directly to our MCC Family universal motor controllers, or they can be used with any 2-phase stepper motor controller through the panel mount DB15 connector. Set up is easy with AutoDetect. Once connected, the controller will automatically detect and configure the VSR.

For more information visit: <https://www.zaber.com/products/vertical-stages/VSR>

## VSR Series Part Numbering & Options

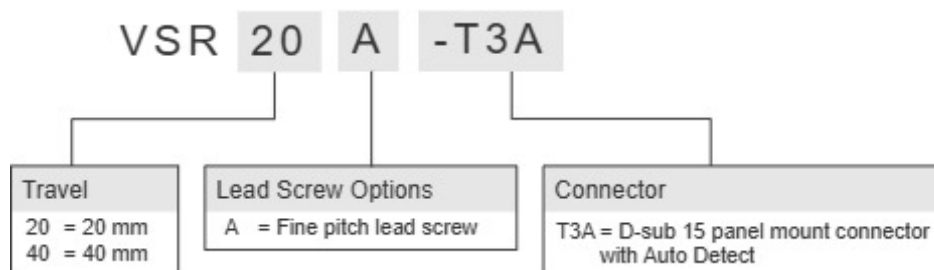

## VSR40A-T3A Drawings

- [VSR.png \(Drawing for the VSR\)](#)


## VSR40A-T3A Specifications

<b>Microstep Size (Default Resolution)</b>	<b>0.09525 <math>\mu\text{m}</math></b>
Built-in Controller	No
Recommended Controller	MCC (48 V) Recommended
AutoDetect	Yes
Travel Range	40 mm (1.575")
Accuracy (unidirectional)	35 $\mu\text{m}$ (0.001378")
Loaded Accuracy (10 N)	20 $\mu\text{m}$ (0.000787")
Repeatability	< 1 $\mu\text{m}$ (< 0.000039")
Loaded Backlash (10 N)	< 10 $\mu\text{m}$ (< 0.000394")
Backlash	< 120 $\mu\text{m}$ (< 0.004724")
Maximum Speed	55 mm/s (2.165"/s)
Minimum Speed	0.000058 mm/s (0.000002"/s)
Speed Resolution	0.000058 mm/s (0.000002"/s)
Peak Thrust	200 N (44.9 lb)
Maximum Continuous Thrust	100 N (22.4 lb)
Maximum Centered Load	100 N (22.4 lb)
Maximum Moment (Pitch)	300 N-cm (424.8 oz-in)
Maximum Moment (Roll)	300 N-cm (424.8 oz-in)
Maximum Moment (Yaw)	300 N-cm (424.8 oz-in)
Horizontal Runout	< 35 $\mu\text{m}$ (< 0.001378")
Pitch	0.08° (1.396 mrad)
Roll	0.08° (1.396 mrad)
Yaw	0.08° (1.396 mrad)
Linear Motion Per Motor Rev	1.2192 mm (0.048")
Motor Steps Per Rev	200
Motor Type	Stepper (2 phase)
Motor Rated Current	1500 mA/phase
Inductance	1.9 mH/phase
Motor Connection	D-sub 15
Default Resolution	1/64 of a step
Guide Type	Crossed-Roller Bearing


<b>Microstep Size (Default Resolution)</b>	<b>0.09525 <math>\mu\text{m}</math></b>
Mechanical Drive System	Precision Lead Screw
Limit or Home Sensing	Magnetic home sensor
Axes of Motion	1
Mounting Interface	M6 and M3 threaded holes
Operating Temperature Range	0-50 °C
CE Compliant	Yes
Vacuum Compatible	No
Weight	0.76 kg (1.676 lb)

## VSR Series Charts

### Thrust Speed Performance

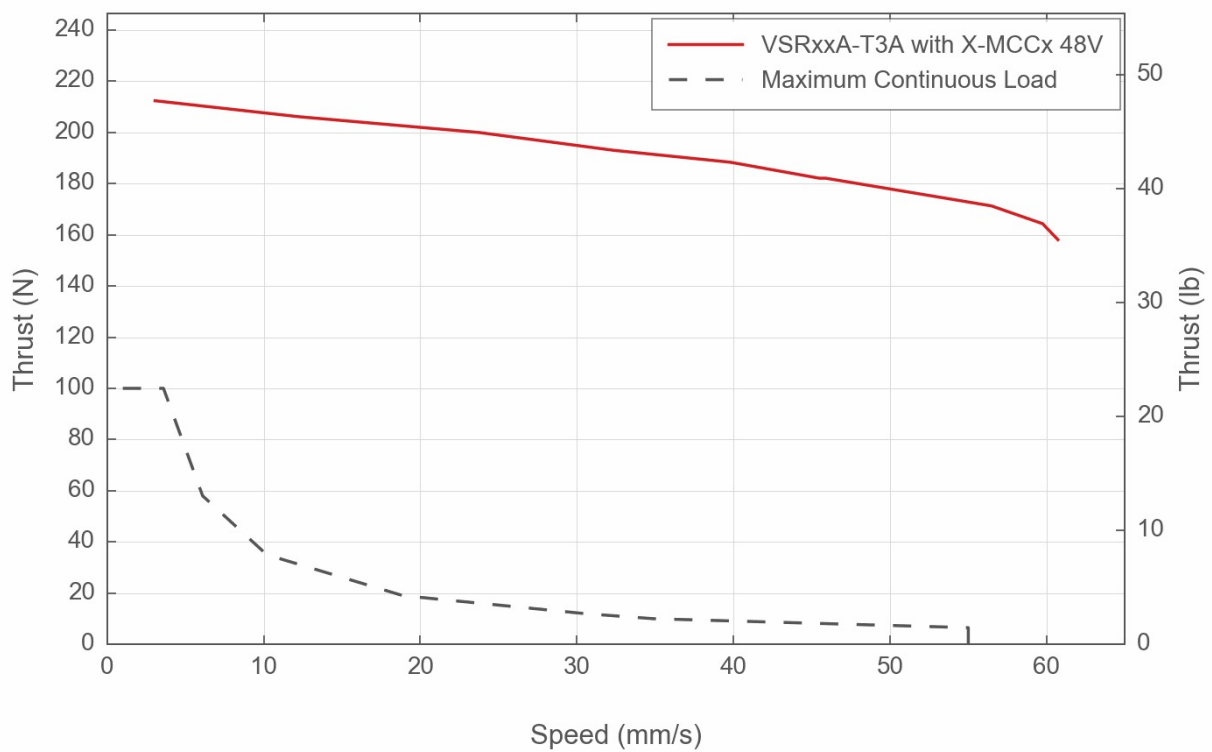

## Typical Accuracy

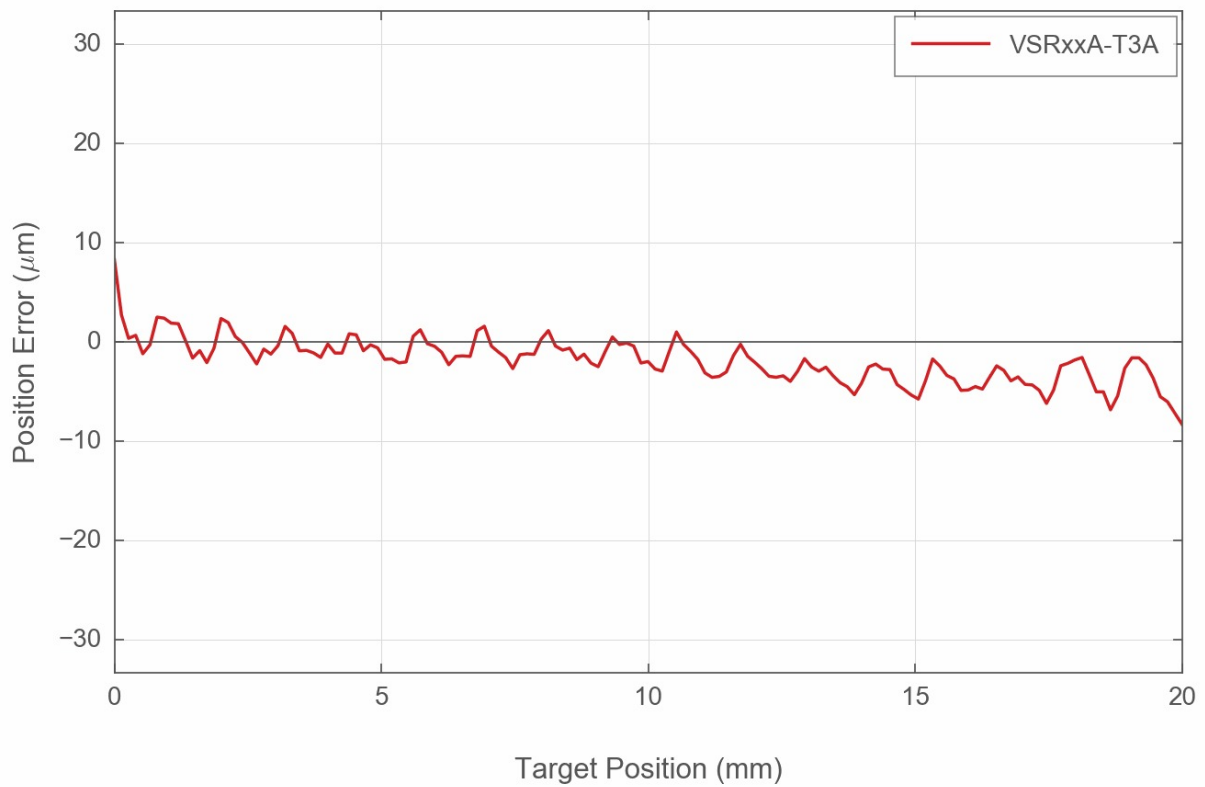

## Contact

Email: [contact@zaber.com](mailto:contact@zaber.com)

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>