

## X-G-RST-DE Series Datasheet



- 360° continuous travel on both azimuth and elevation axes
- Speed up to 24°/s; max torque 10 N-m; max payload 15 kg
- Direct reading encoder for slip/stall detection and position correction
- 300 and 500 mm width frame options
- Adjustable elevation offset for optimizing alignment and performance
- Built-in controllers & slip ring for effortless cable management
- Custom versions available

## X-G-RST-DE Series Overview


Zaber's X-G-RST-DE series products are motorized two-axis rotation stage devices with built-in controllers and direct reading encoders for high accuracy motion. Rated for up to 15 kg load capacity centered about the elevation axis and 10 N-m of torque, they are ideal for high-load, high-precision, angular positioning in optics, telecom, scanning, and tracking applications.

These gimbals ship assembled, making them 'plug and play'. They are easy to set up and operate. A variety of standard crossmembers for both metric and imperial mounting are available: AP193M, AP193E, AP194M & AP194E; custom versions are also available. The adjustable height of the elevation assembly provides a versatile solution for centering different size payloads.

Zaber's X-RST-DE rotary stages with built-in controllers allow daisy-chaining power and communication. This means only one standard 48 V power supply is needed to power the gimbal. A single RS-232 or USB port from a computer can be used for convenient control of both axes of the system. The rotary stages are daisy-chained via slip ring offering tangle free cable management with unlimited rotation. Four additional signal wires are included through the slip ring, available for your convenience.

For more information visit: <https://www.zaber.com/products/gimbal-stages/X-G-RST-DE>

## X-G-RST-DE Series Part Numbering & Options

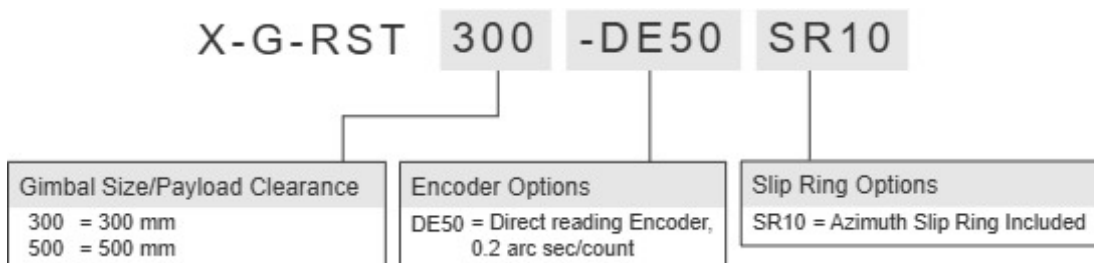

## X-G-RST-DE Series Drawings

- [X-G-RST-DE.png \(Drawing for the X-G-RST-DE\)](#)

## X-G-RST-DE Series Specifications

<b>Microstep Size (Default Resolution)</b>	<b>0.00015625° (2.727 μrad)</b>
Built-in Controller	Yes
Range	360°
Accuracy (unidirectional)	0.01° (0.174500 mrad)
Repeatability	< 0.005° (< 0.087 mrad)
Backlash	< 0.005° (< 0.087 mrad)
Maximum Speed	24°/s (4 rpm)
Encoder Count Size	0.00005556°/count (0.200016 arcseconds/count)
Minimum Speed	0.000095°/s (1.658 μrad/s)
Speed Resolution	0.000095°/s (1.658 μrad/s)
Encoder Resolution	1620000 CPR (6480000 states/rev)
Encoder Type	Direct reading optical encoder
Communication Interface	RS-232
Communication Protocol	Zaber ASCII (Default), Zaber Binary
Data Cable Connection	Locking 4-pin M8
Maximum Continuous Torque	1000 N-cm (1416.1 oz-in)
Maximum Centered Load	150 N (See Spec Definition) (33.6 lb)
Aperture Diameter	50.8 mm (2.000")
Power Supply	48 VDC
Power Plug	2-pin Screw Terminal
Maximum Current Draw	2200 mA
Angular Motion Per Motor Rev	2°
Motor Steps Per Rev	200
Motor Type	Stepper (2 phase)
Motor Rated Current	1500 mA/phase
Inductance	6.6 mH/phase
Default Resolution	1/64 of a step
Maximum Angular Momentum	0.4 kg-m <sup>2</sup> /s
Mechanical Drive System	Precision Worm Gear
Limit or Home Sensing	Magnetic home sensor
Gear Ratio	180:1

<b>Microstep Size (Default Resolution)</b>	<b>0.00015625° (2.727 μrad)</b>
Manual Control	Yes
Operating Temperature Range	0-50 °C
CE Compliant	Yes
Vacuum Compatible	No

<b>Part Number</b>	<b>Weight</b>
X-G-RST300-DE50SR10	13.3 kg (29.321 lb)
X-G-RST500-DE50SR10	13.9 kg (30.644 lb)

## Contact

Email: [contact@zaber.com](mailto:contact@zaber.com)

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>