

## X-NA08A25-SV1 Datasheet



- Vacuum compatible to  $10^{-3}$  Torr
- 25 and 50 mm travel
- Up to 25 mm/s speed and up to 25 N thrust
- Hardened ball-tip (removable so you can use the built-in threaded tip or a flat tip)
- Our most compact, precise and robust actuator
- Designed to replace standard micrometer heads on manual translation stages
- Built-in controller; daisy chains with other X-series devices inside vacuum chamber

## X-NA-SV1 Series Overview

Zaber's X-NA-SV1 Series devices are low-vacuum compatible, computer-controlled, motorized miniature linear actuators with high thrust and speed capabilities, and a compact size. They are stand-alone units requiring only a standard 24 V or 48 V power supply.

These actuators connect to the RS-232 port or USB port of any computer, and they can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply.


At only 20 mm wide, these miniature actuators are excellent for applications where a small profile is required. The X-NA-SV1 is designed with vacuum compatible materials to minimize outgassing and allow for faster pump down times. Like all of Zaber's products, the X-NA-SV1 Series is designed to be 'plug and play' and very easy to set up and operate.

For more information about the basics of a vacuum system and considerations to keep in mind when gathering requirements for your application, read our technical article, "Motion Device Design Considerations for Vacuum Applications".

See our Vacuum Compatible TSB-V Linear Slides for more information on compatible slides.

For more information visit: <https://www.zaber.com/products/vacuum-compatible-stages/X-NA-SV1>

## X-NA-SV1 Series Part Numbering & Options

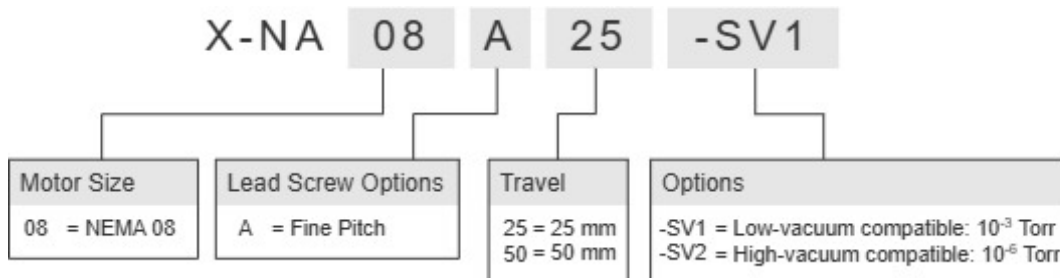

## X-NA08A25-SV1 Drawings

- [X-NA-SV.png \(Drawing for the X-NA-SV\)](#)


## X-NA08A25-SV1 Specifications

<b>Microstep Size (Default Resolution)</b>	<b>0.047625 <math>\mu\text{m}</math></b>
Built-in Controller	Yes
Travel Range	25.4 mm (1.000")
Accuracy (unidirectional)	40 $\mu\text{m}$ (0.001575")
Repeatability	< 1 $\mu\text{m}$ (< 0.000039")
Backlash	< 15 $\mu\text{m}$ (< 0.000591")
Maximum Speed	25 mm/s (0.984"/s)
Minimum Speed	0.000029 mm/s (0.000001"/s)
Speed Resolution	0.000029 mm/s (0.000001"/s)
Encoder Type	No
Peak Thrust	25 N (5.6 lb)
Maximum Continuous Thrust	25 N (5.6 lb)
Communication Interface	RS-232
Communication Protocol	Zaber ASCII (Default), Zaber Binary
Data Cable Connection	Teflon flying leads with 4-pin M8 M/F
Power Supply	24-48 VDC
Power Plug	None, use X-PIB
Maximum Current Draw	180 mA
Motor Steps Per Rev	200
Motor Type	Stepper (2 phase)
Inductance	1.5 mH/phase
Default Resolution	1/64 of a step
Mechanical Drive System	Precision lead screw
Limit or Home Sensing	Magnetic hall sensor
Axes of Motion	1
Mounting Interface	3/8-32 nut, 3/8" shank, or M3 screws
Operating Temperature Range	0 to 50 °C
CE Compliant	Yes


<b>Microstep Size (Default Resolution)</b>	<b>0.047625 <math>\mu\text{m}</math></b>
Vacuum Compatible	Low vacuum (10 <sup>-3</sup> Torr)
<b>Weight</b>	<b>0.156 kg (0.344 lb)</b>

### X-NA-SV1 Series Charts

**Thrust Speed Performance**

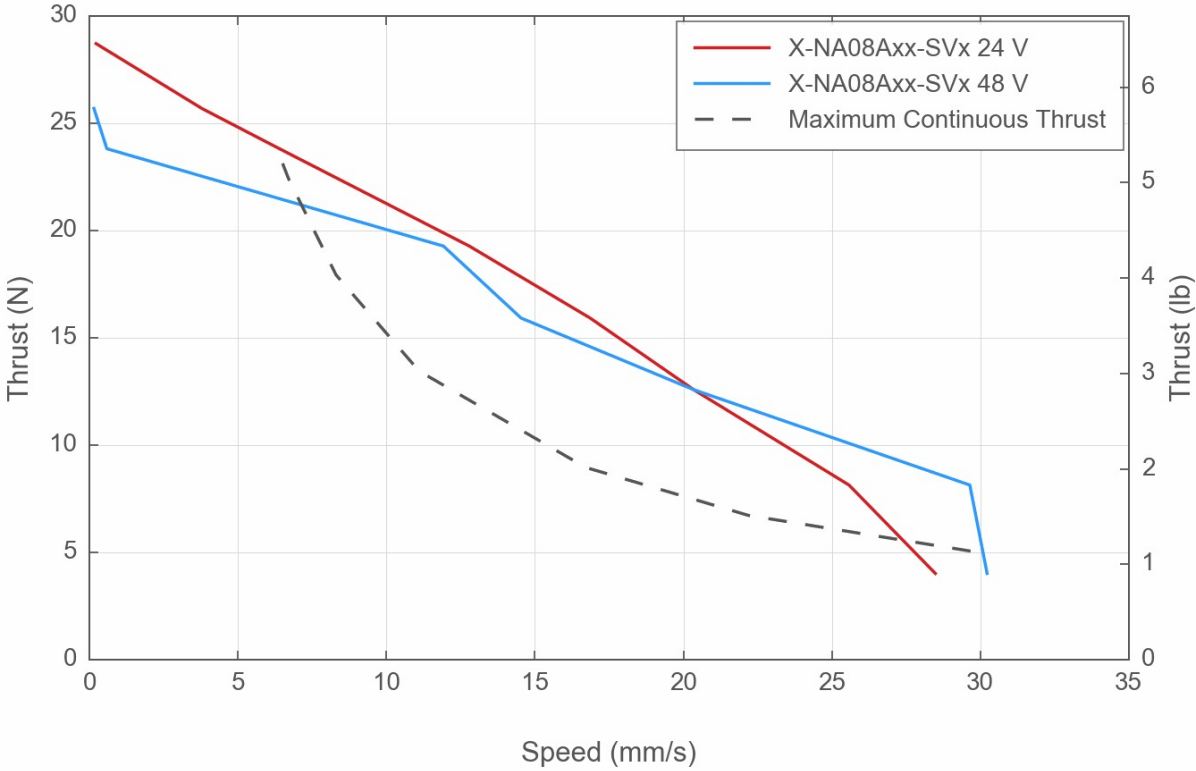

## Recommended Duty Cycle

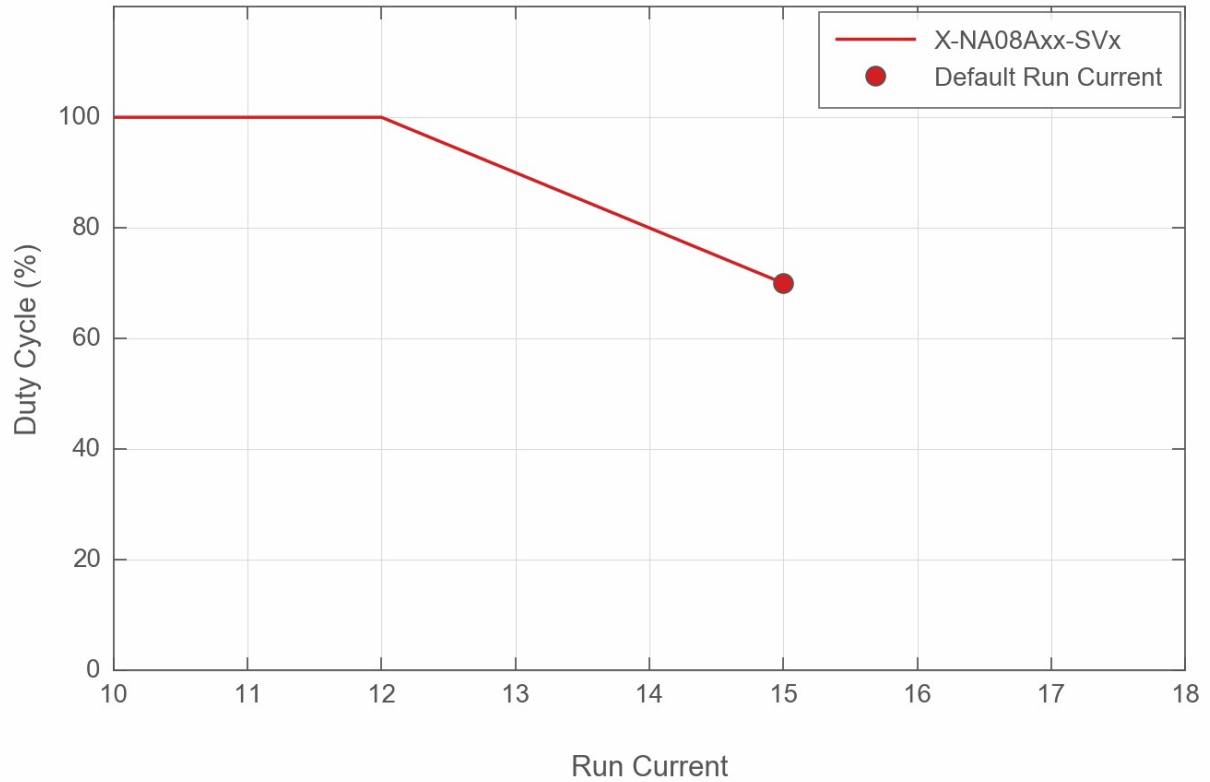

## Contact

Email: [contact@zaber.com](mailto:contact@zaber.com)

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>