

## X-LSQ075B-E01C Datasheet



- 75, 150, 300, 450 and 600 mm travel
- 50 kg load capacity
- Up to 1 m/s speed and up to 100 N thrust
- Includes rigid cover
- Integrated recirculating ball bearing guide provides exceptional lifetime
- Encoder position feedback with slip/stall detection and automatic recovery
- Built-in controller; daisy-chains with any other Zaber products
- Custom versions available


## X-LSQ-EC Series Overview

Zaber's X-LSQ-EC Series products are computer controlled, motorized linear stages with a variety of lead screw pitches and travels. The built-in motor encoder allows closed-loop operation and slip/stall recovery features. A rigid non-contact cover prevents the ingress of small objects. They are stand-alone units requiring only a 48 V power supply, included with the kit version. An indexed knob provides convenient manual control for versatile operation even without a computer - press and hold to switch between velocity mode and position mode and push to stop.

These stages connect to the RS-232 port or USB port of any computer, and they can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply. Convenient locking, 4-pin, M8 connectors on the unit allow for secure connection between devices.

For more information visit: <https://www.zaber.comproducts/linear-stages/X-LSQ-EC>

## X-LSQ-EC Series Part Numbering

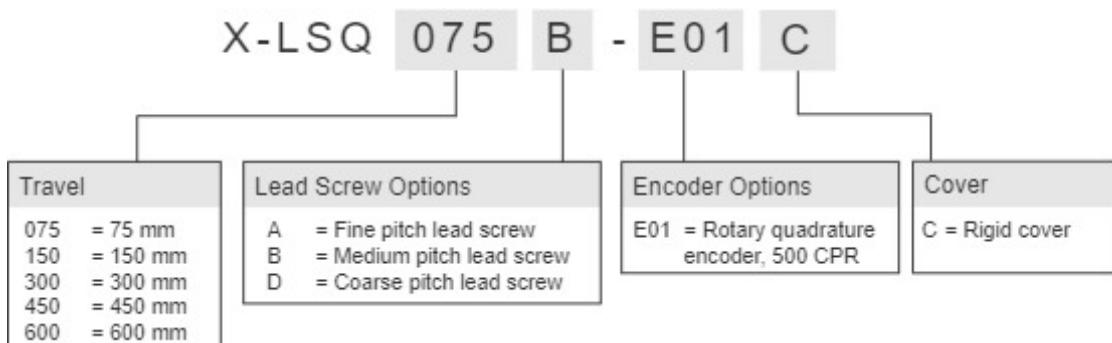

## X-LSQ075B-E01C Drawings

# ZABER

X-LSQ-EC Motorized Linear Stage


dimensions in mm

Model Number*	Travel	A	B
X-LSQ075-EC	75.0	286.2	145.0
X-LSQ150-EC	150.0	361.2	220.0
X-LSQ300-EC	300.0	511.2	370.0
X-LSQ450-EC	450.0	661.2	520.0
X-LSQ600-EC	600.0	811.2	670.0

\*See product page for complete list of available models at [www.zaber.com](http://www.zaber.com)

\*\*Home position distance based on lead screw pitch:

- A - 2.0 +/- 0.4 mm
- B - 2.2 +/- 0.4 mm
- D - 2.8 +/- 0.4 mm

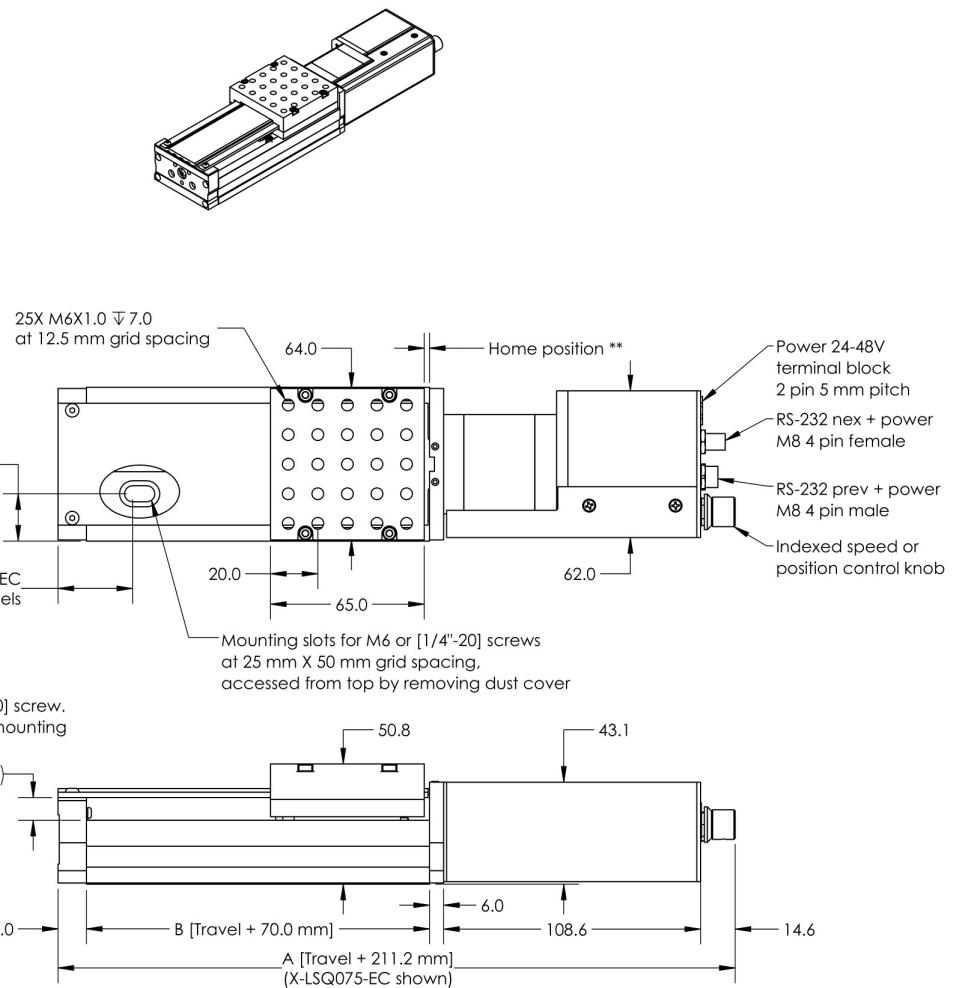

DWG 3240 R01


## X-LSQ075B-E01C Specifications

Specification	Value	Alternate Unit
Microstep Size (Default Resolution)	0.49609375 $\mu\text{m}$	
Built-in Controller	Yes	
Travel Range	75 mm	2.953"
Accuracy (unidirectional)	45 $\mu\text{m}$	0.001772"
Repeatability	< 3 $\mu\text{m}$	< 0.000118"
Backlash	< 18 $\mu\text{m}$	< 0.000709"
Maximum Speed	280 mm/s	11.024"/s
Minimum Speed	0.000303 mm/s	0.000012"/s
Speed Resolution	0.000303 mm/s	0.000012"/s
Encoder Resolution	500 CPR	2000 states/rev
Encoder Type	Rotary quadrature encoder	
Peak Thrust	120 N	26.9 lb
Back-driving Force	44 N ( $\pm$ 30%)	9.9 lb ( $\pm$ 30%)
Maximum Continuous Thrust	75 N	16.8 lb
Communication Interface	RS-232	
Communication Protocol	Zaber ASCII (Default), Zaber Binary	
Data Cable Connection	Locking 4-pin M8	
Maximum Centered Load	500 N	112.1 lb
Maximum Cantilever Load	2000 N-cm	2832.2 oz-in
Guide Type	Recirculating Ball Linear Guide	
Vertical Runout	< 30 $\mu\text{m}$	< 0.001181"
Horizontal Runout	< 20 $\mu\text{m}$	< 0.000787"
Pitch	0.06°	1.047 mrad
Roll	0.03°	0.523 mrad
Yaw	0.03°	0.523 mrad
Stiffness in Pitch	150 N-m/°	116 $\mu\text{rad}/\text{N-m}$
Stiffness in Roll	225 N-m/°	78 $\mu\text{rad}/\text{N-m}$
Stiffness in Yaw	150 N-m/°	116 $\mu\text{rad}/\text{N-m}$
Power Supply	24-48 VDC	
Power Plug	2-pin Screw Terminal	


Specification	Value	Alternate Unit
Maximum Current Draw	1450 mA	
Linear Motion Per Motor Rev	6.35 mm	0.250"
Motor Steps Per Rev	200	
Motor Type	Stepper (2 phase)	
Motor Rated Current	2300 mA/phase	
Inductance	2.2 mH/phase	
Default Resolution	1/64 of a step	
Mechanical Drive System	Precision lead screw	
Limit or Home Sensing	Magnetic home sensor	
Manual Control	Indexed knob with push switch	
Axes of Motion	1	
LED Indicators	Yes	
Mounting Interface	M6 threaded holes	
Stage Parallelism	< 100 $\mu$ m	< 0.003937"
Operating Temperature Range	0 to 50 °C	
RoHS Compliant	Yes	
CE Compliant	Yes	
Vacuum Compatible	No	
Weight	1.36 kg	2.998 lb

## X-LSQ-EC Series Charts


### Thrust Speed Performance

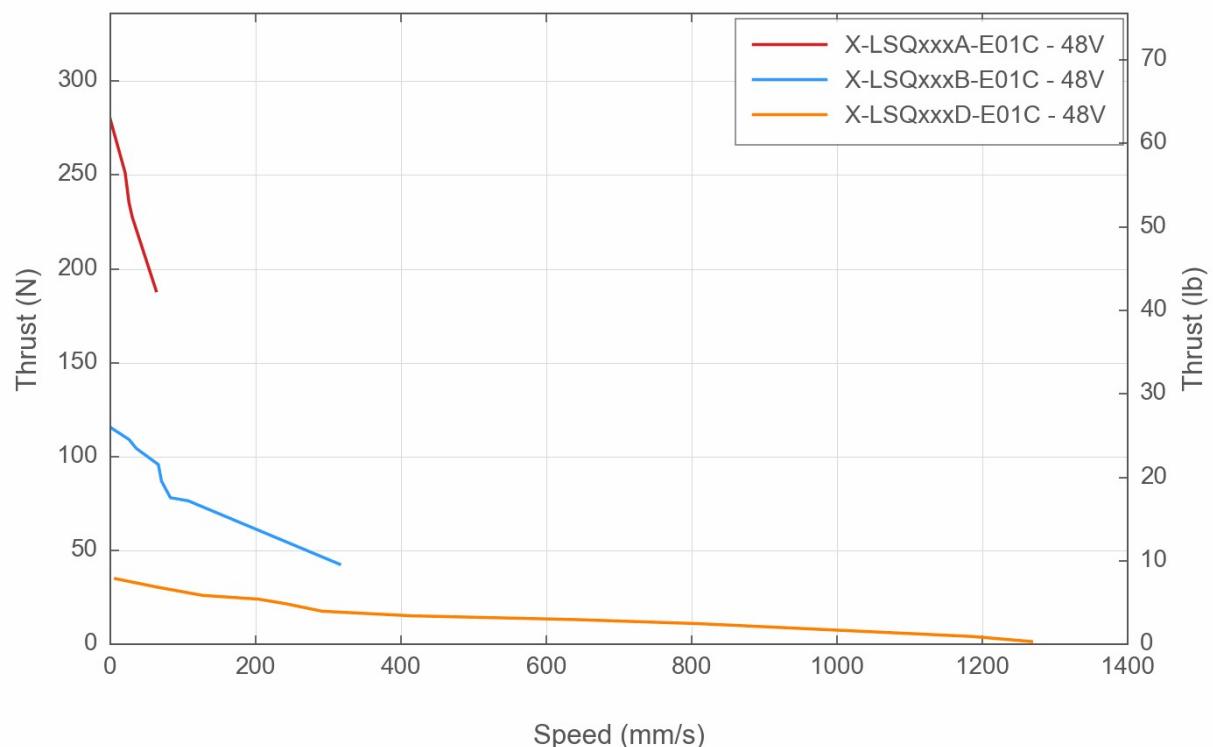


### Thrust Speed Performance

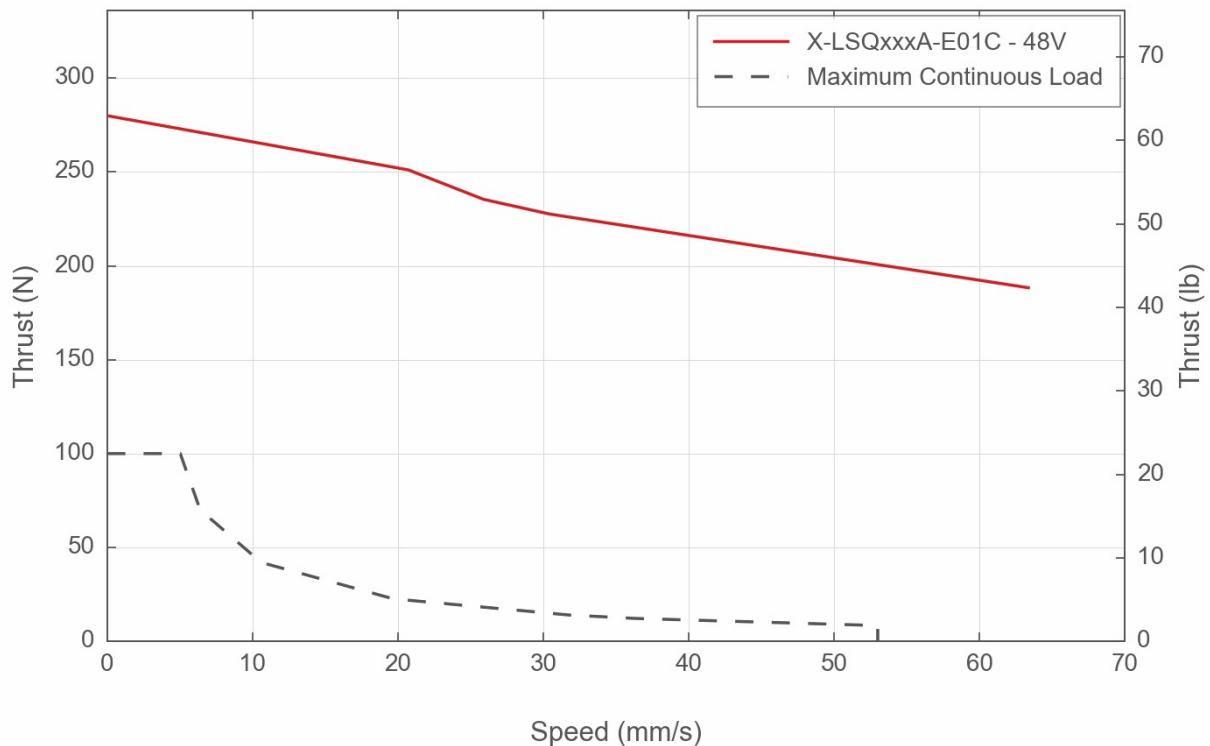


### Thrust Speed Performance

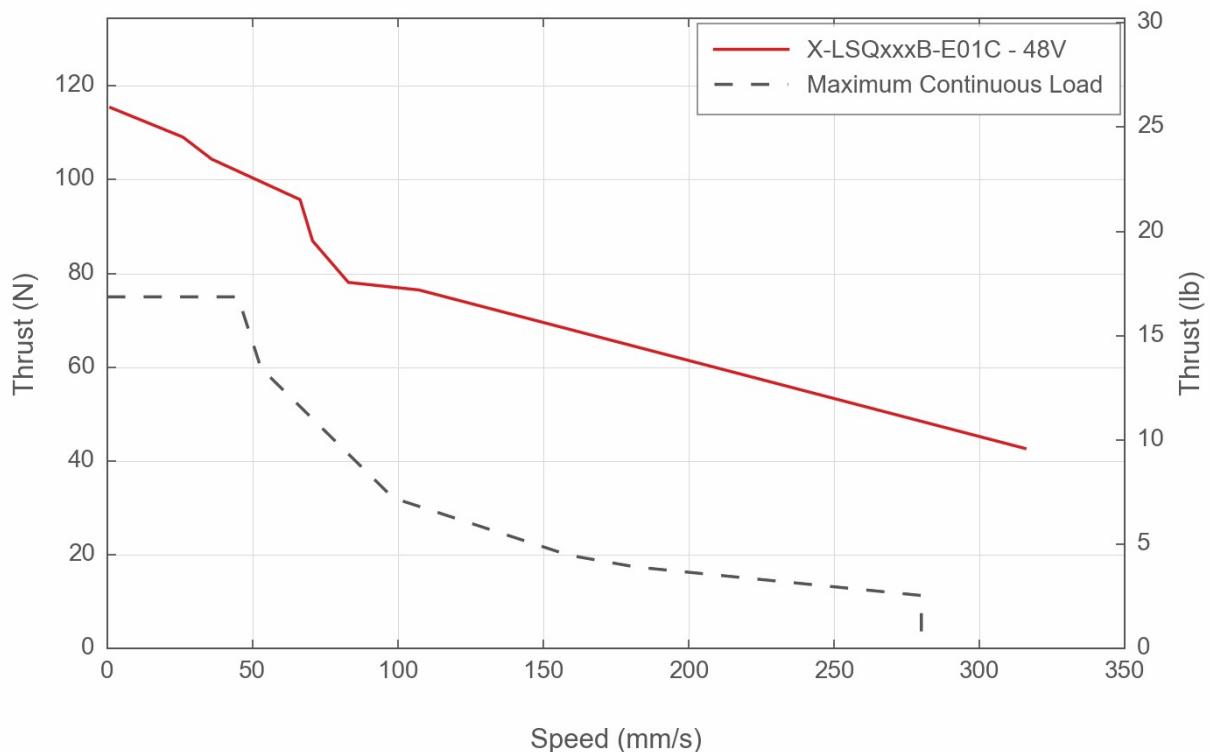


## Thrust Speed Performance

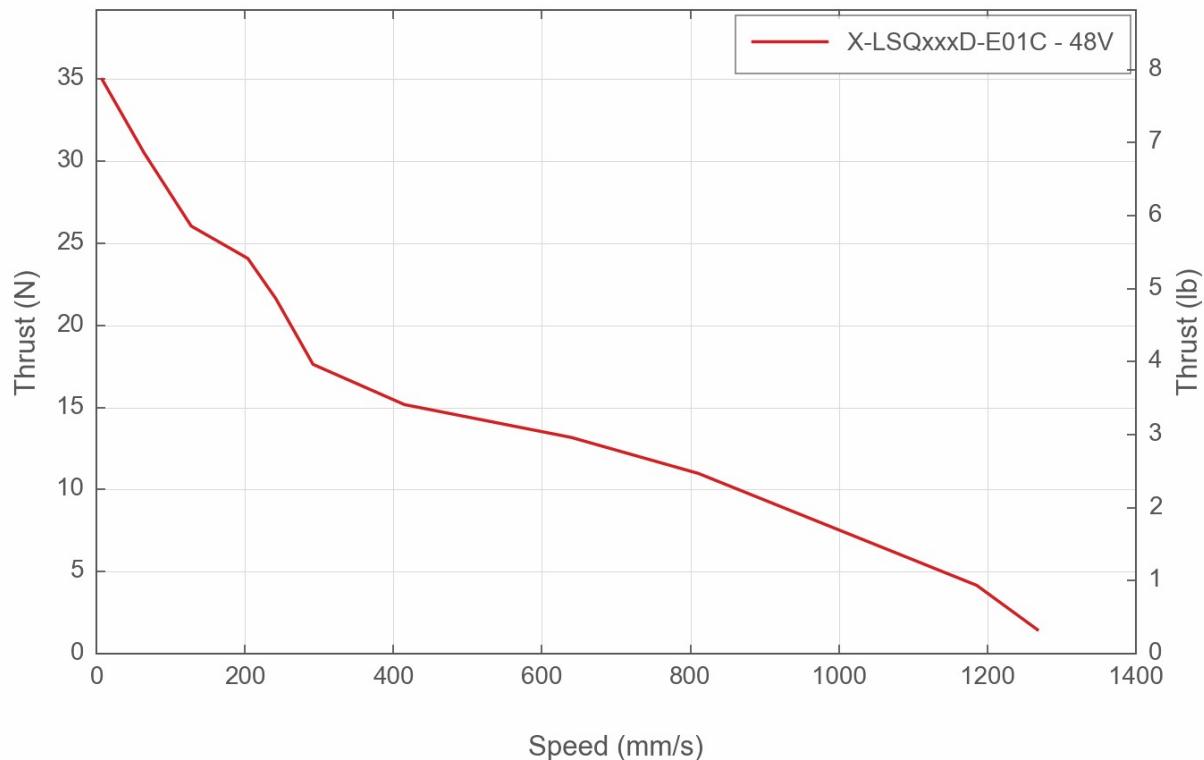


## Typical Microstepping Accuracy

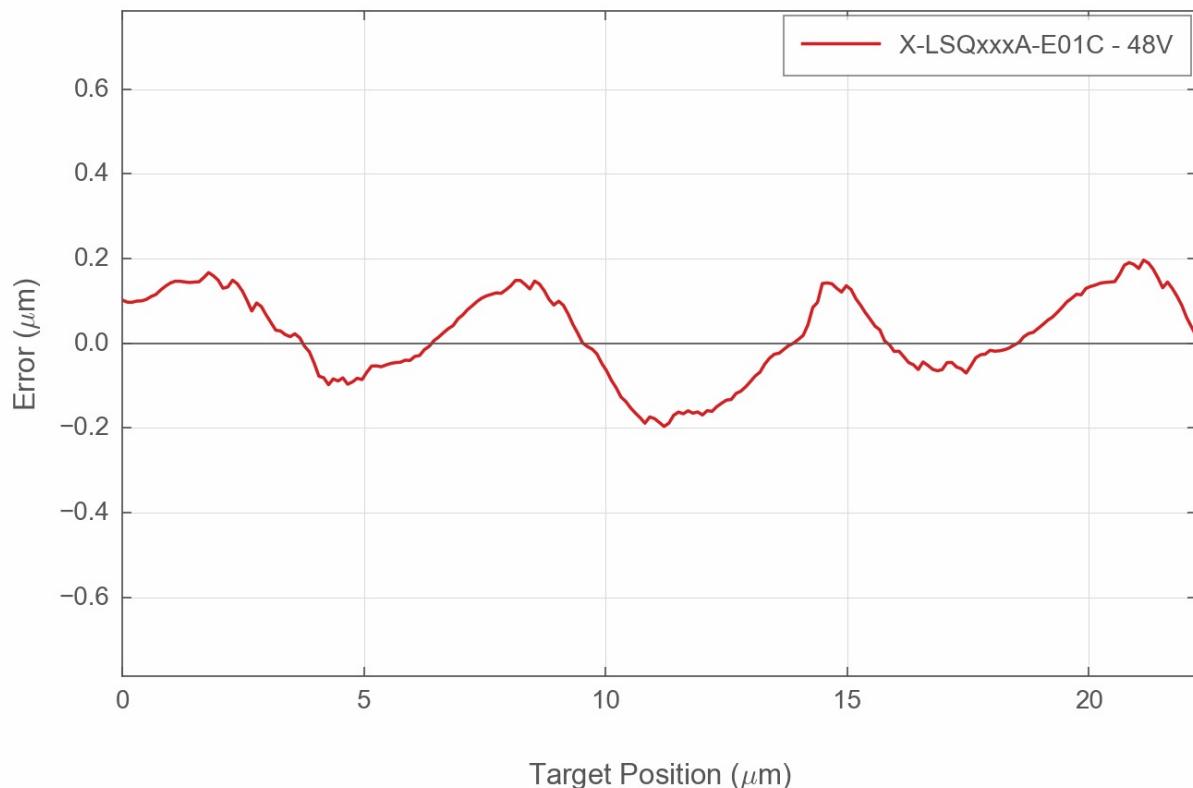


## Typical Microstepping Accuracy

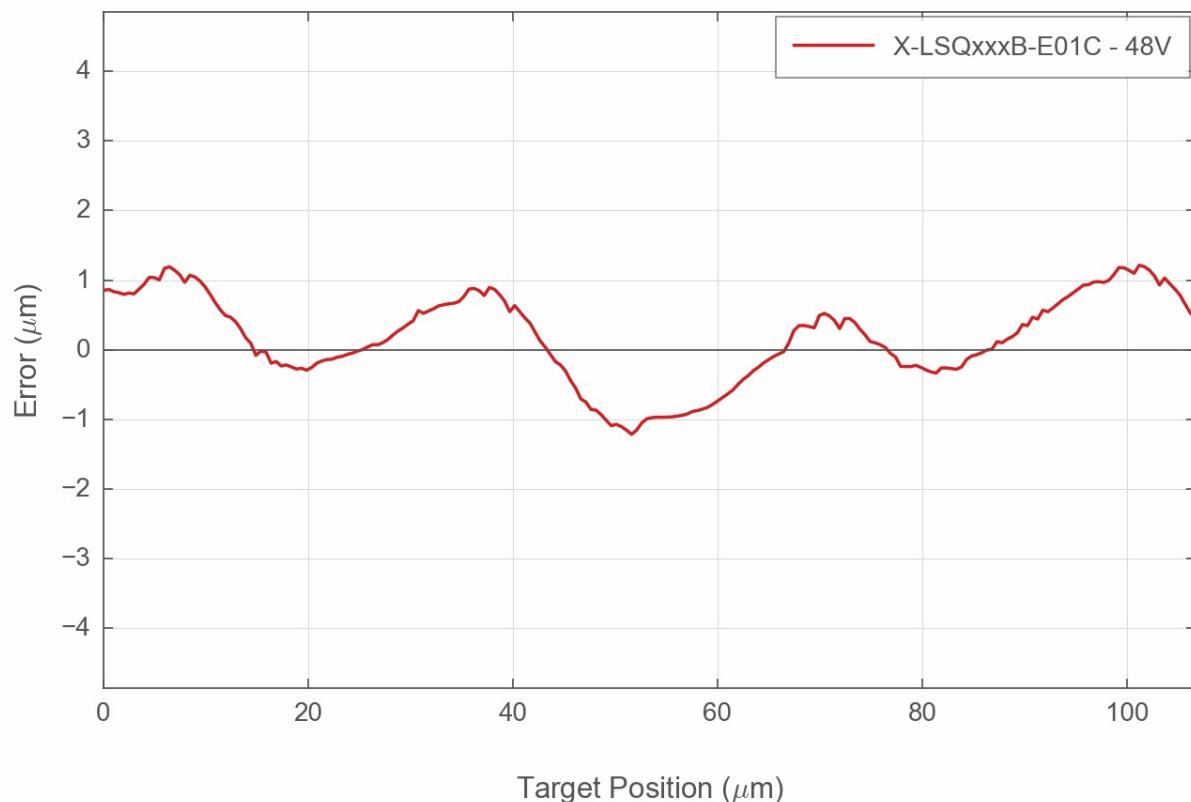

## Typical Microstepping Accuracy

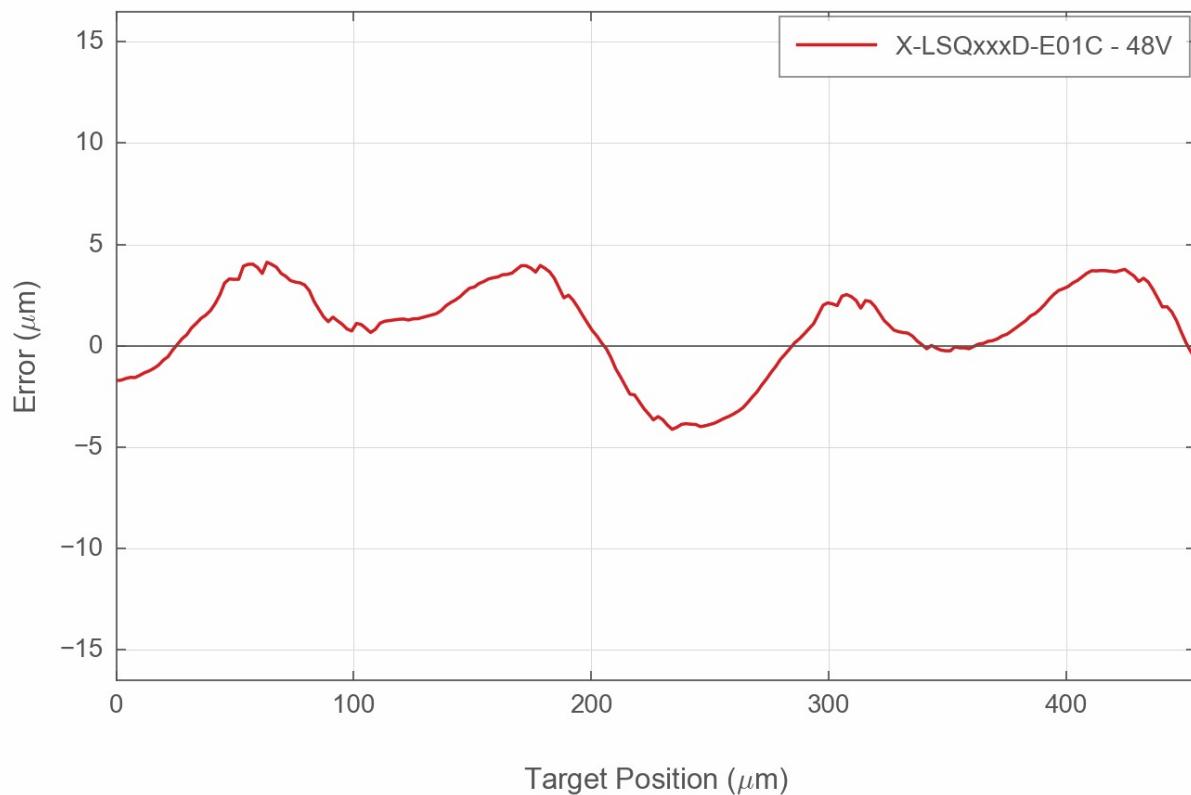

## LSQ Linear Bearing Lifetime

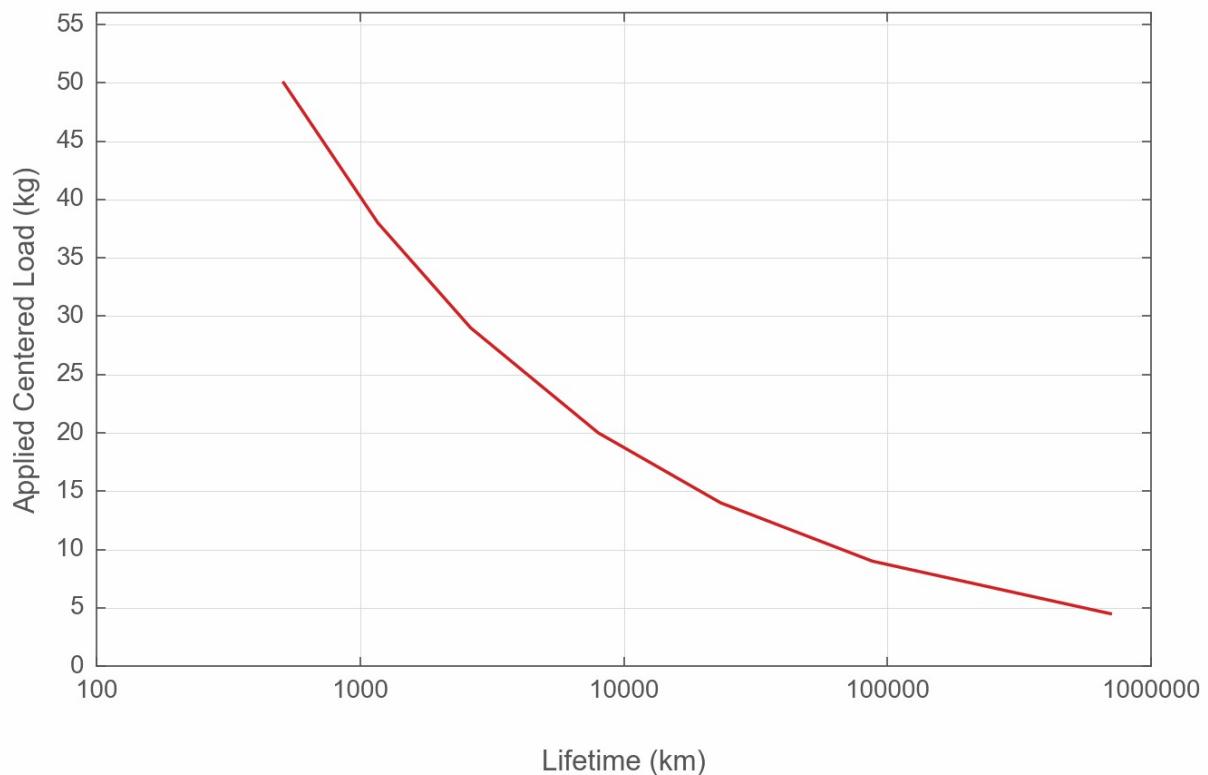

## Contact

Email: [contact@zaber.com](mailto:contact@zaber.com)

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>