

NMS23-T4A Datasheet




- NEMA size 08 to 23 stepper motors offer a range of size and torque
- Up to 3000 rpm speed and 1.8 N-m torque
- HS02 home sensor and magnet included
- Designed for use with an X-MCC Series stepper motor controller or any 2-phase stepper motor controller
- With AutoDetect, the X-MCC controller configures its settings automatically for the connected peripheral

NMS Series Overview

These NEMA stepper motors are designed to connect directly to our X-MCC using a single cable. Set-up is easy with AutoDetect. Once connected, the X-MCC controller will automatically detect and configure the motor. A detachable home sensor (HS02) and magnet are included.

For more information visit: <https://www.zaber.com/products/stepper-motors/NMS>

NMS Series Part Numbering & Options

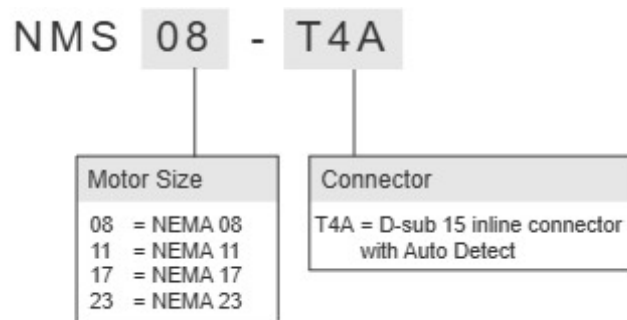

NMS23-T4A Drawings


- [NMS23.png \(Drawing for the NMS23\)](#)

NMS23-T4A Specifications


Microstep Size (Default Resolution)	0.028125° (490.866 μrad)
Built-in Controller	No
Recommended Controller	MCC (48 V) Recommended
AutoDetect	Yes
Maximum Speed	18000°/s (3000 rpm)
Minimum Speed	0.017172°/s (299.703 μrad/s)
Speed Resolution	0.017172°/s (299.703 μrad/s)
Maximum Torque	180 N-cm (254.9 oz-in)
Motor Steps Per Rev	200
Motor Type	Stepper (2 phase)
Motor Rated Current	3000 mA/phase
Motor Winding Resistance	0.53 ohms/phase
Inductance	2 mH/phase
Motor Connection	D-sub 15
Motor Frame Size	NEMA 23
Limit or Home Sensing	Magnetic home sensor
Operating Temperature Range	0 to 50 °C
CE Compliant	Yes
Vacuum Compatible	No
Weight	1.01 kg (2.227 lb)

NMS Series Charts


Torque Speed Performance

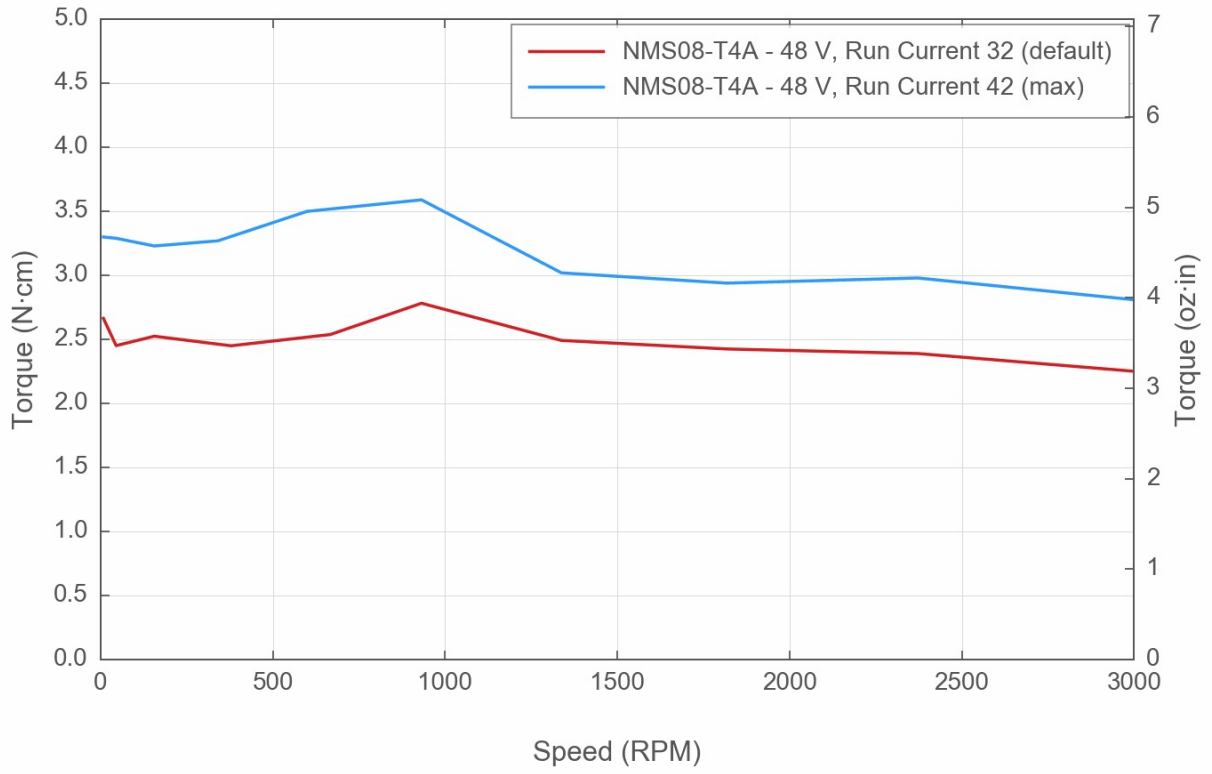


Torque Speed Performance

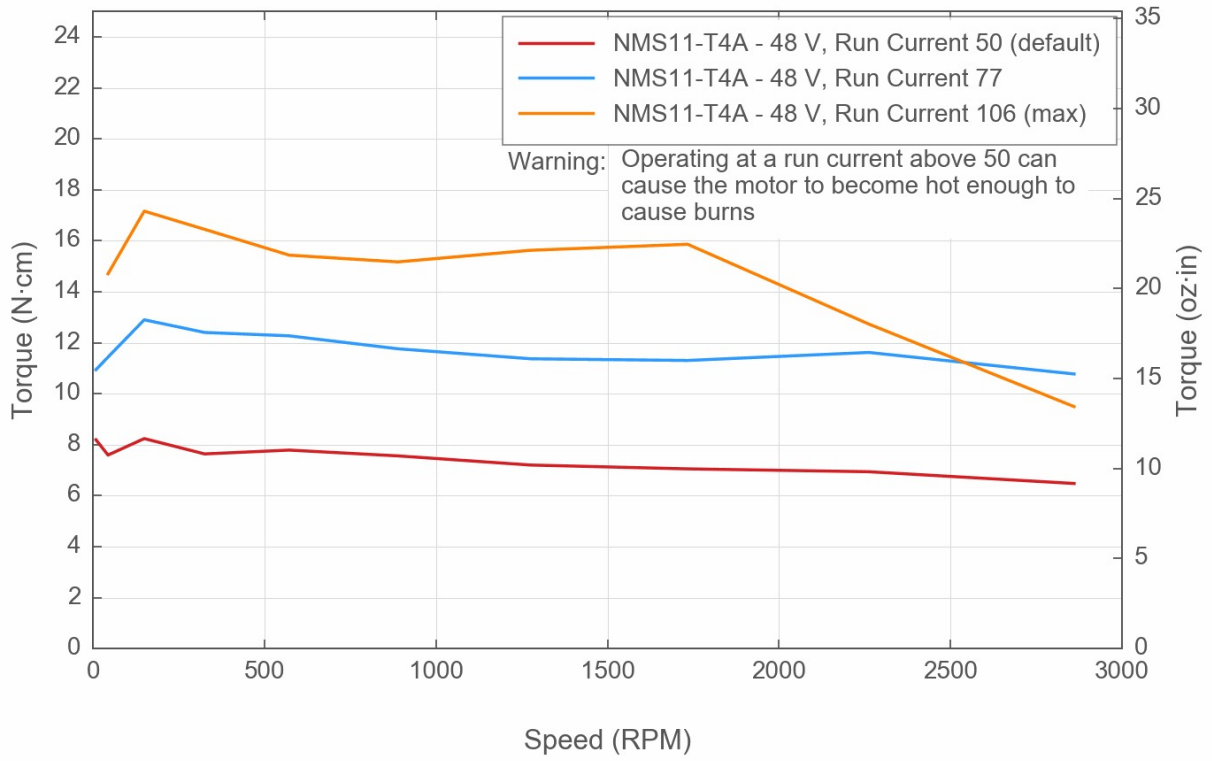

Torque Speed Performance

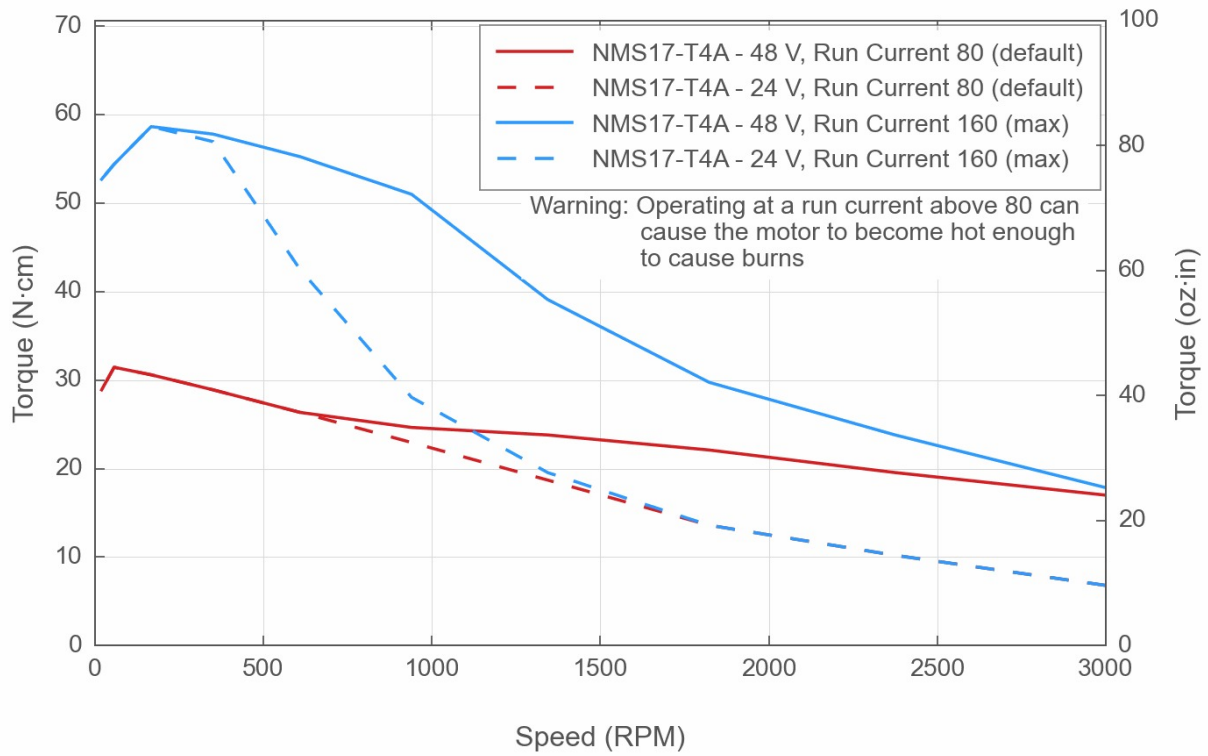

Torque Speed Performance

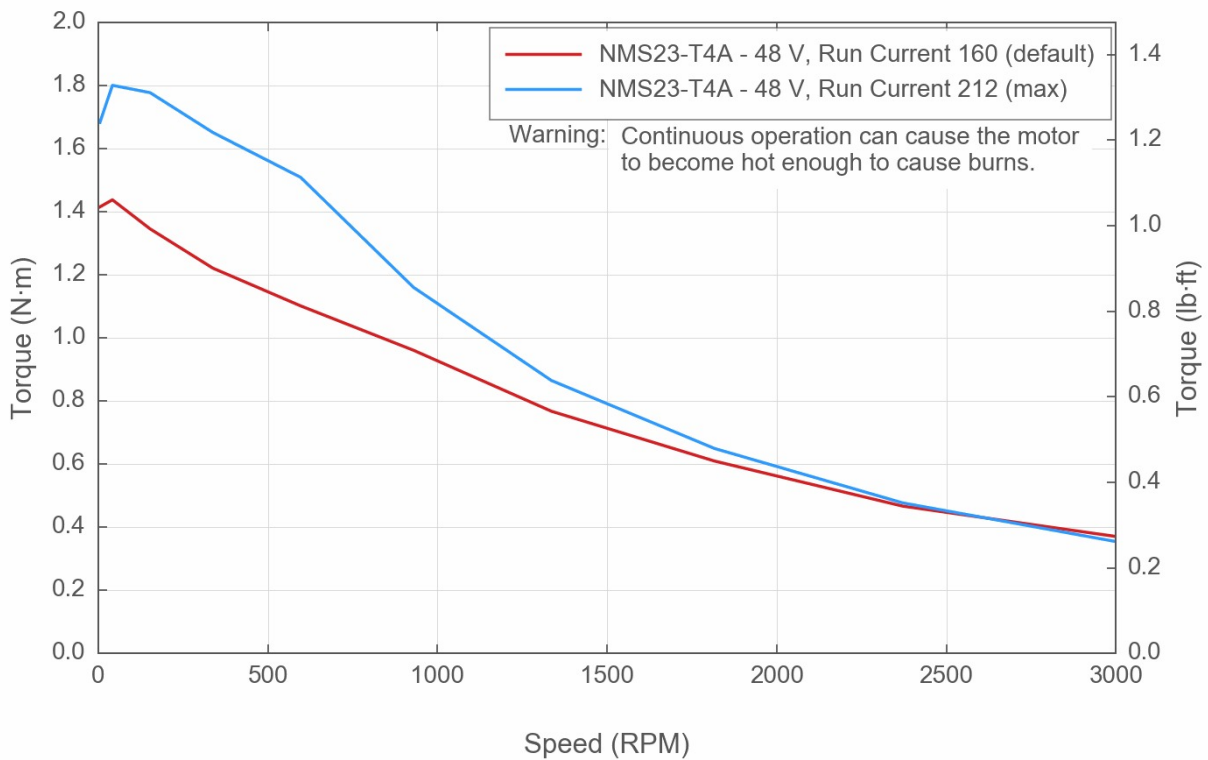

Contact

Email: contact@zaber.com

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>